

CL6700 (CL6700N: 19" LCD)

DVI LCD Console


- The CL6700 DVI LCD Console is a KVM control unit featuring an integrated 19" DVI LCD panel, a full keyboard, and a touch pad in a 1U rack-mountable sliding housing with audio support. The CL6700 serves as the front end sliding console for compatible DVI KVM switches. This means users who already have a compatible KVM switch can take advantage of the space saving and efficiency benefits of the sliding console module without having to purchase a KVM switch module.

For added convenience, a port for an external USB mouse is provided on the unit's front panel, while ports for an extra console (USB mouse, USB keyboard, DVI monitor and VGA monitor) for a second user are provided on the rear panel.



Features

- Integrated KVM console with a 19" DVI LCD monitor in a single rail housing with top and bottom clearance for smooth operation in a 1U high system rack
- Standard rack mount kit included – optional Easy Rack Mounting (single person installation) rack mount kit available (requires separate purchase)
- Supports an external console with USB / DVI / VGA connectors
- Additional hot-pluggable USB mouse port on front panel (also functions as USB peripheral port)
- Audio support (speakers)
- Superior video quality – up to 1280 x 1024 @75 Hz; DDC, DDC2, DDC2B
- Standard 105-key keyboard; Sun keyboard emulation
- Multiplatform support – Windows, Linux, Mac, and Sun
- Compatible with most ATEN DVI KVM Switches
- Adjustable depth to fit within the rack
- Firmware upgradeable
- Console lock – enables the console drawer to remain securely locked away in position when not in use
- DDC emulation – video settings of each computer are automatically adjusted for optimal output to the monitor

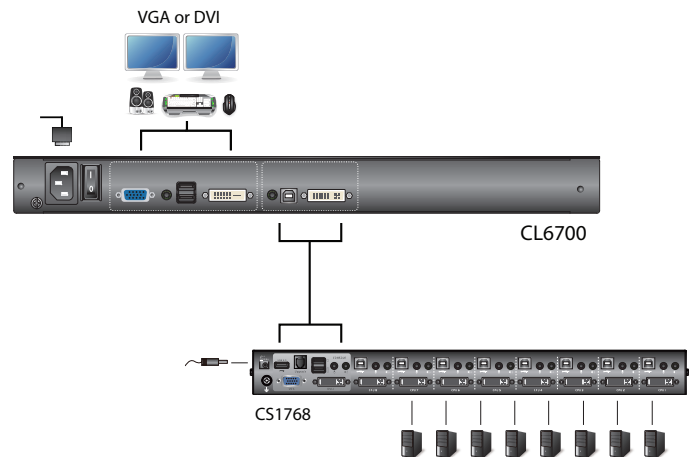

Specification

Function			CL6700
Computer Connections			1
Console Selection			Hotkey
Connectors	External Console Ports	Keyboard	1 x USB Type A Female (White)
		Mouse	1 x USB Type A Female (White)
		Monitor 1	1 x DVI-D Female (White)
		Monitor 2	1 x HDB-15 Female (Blue)
	KVM Ports	Speaker	1 x Mini Stereo Jack Female (Green)
		KB / Mouse	1 x USB Type B Female (White)
		Monitor	1 x DVI-I Female (White)
		Speaker	1 x Mini Stereo Jack Female (Green)
		External Mouse / Peripheral	1 x USB Type A Female (Black)
	Power	1 x 3-prong AC Socket	
Switches	Reset	1 x Semi-recessed Pushbutton	
	Power	1 x Rocker	
	F/W Upgrade	1 x Slide	
	LCD Power	1 x Pushbutton	
	LCD Adjustment	4 x Pushbutton	
LEDs	Power	1 (Green)	
	Lock	Num	1 (Green)
		Caps	1 (Green)
		Scroll	1 (Green)
Emulation	Keyboard / Mouse		USB
Video		1280 x 1024@75Hz, DDC2B	
I/P Rating		100–240VAC; 50–60Hz; 1A	
Power Consumption		120V, 24.6W / 230V, 25.4W	
Environment	Operating Temp.		0–50°C
	Storage Temp.		–20–60°C
	Humidity		0–80% RH Non-condensing
Physical Properties	Housing		Metal
	Weight		13.09 kg
	Dimensions (L x W x H)		58.92 x 48.50 x 4.40 cm

* Product specifications and appearance are subject to change without notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com

Printed 07/2014 V4.0



© Copyright 2014 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.