



# 2A-130G

## VGA EDID Emulator

### Quick Start Guide

© Copyright 2014 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners.

This product is RoHS compliant.

Part No. PAPE-1285-441G      Printing Date: 04/2014



**Online Registration**  
<http://eservice.aten.com>

**Technical Phone Support**  
**International:**  
 886-2-86926959

**North America:**  
 1-888-999-ATEN  
 Ext: 4988

**United Kingdom:**  
 44-8-4481-58923

#### Important Notice

Considering environmental protection, ATEN does not provide a fully printed user manual for this product. If the information contained in the Quick Start Guide is not enough for you to configure and operate your product, please visit our website [www.aten.com](http://www.aten.com), and download the full user manual.

The following contains information that relates to China:

零件名称	有害物质含量或浓度			
	铅	汞	六价铬	多溴联苯 多溴二苯醚
显示面板	○	○	○	○
结构部件	○	○	○	○


- : 表示该有害物质在该部件所有均质材料中的含量均在SJ/T 11363-2006规定的限量要求之下。
- : 表示符合欧盟的豁免条款, 但含有有害物质至少在部件的某一均质材料中的含量超出SJ/T 11363-2006的限量要求。
- ×: 表示该有害物质在该部件所有均质材料中的含量超出SJ/T 11363-2006的限量要求。

All information, documentation, and specifications contained in this package are subject to change without prior notification by the manufacturer.


## Package Contents

- 1 2A-130G VGA EDID Emulator
- 1 User Instructions

## A Hardware Review

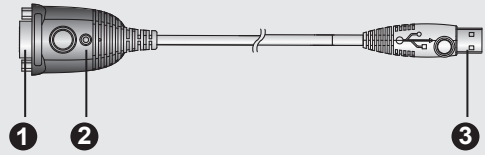

## B Hardware Installation

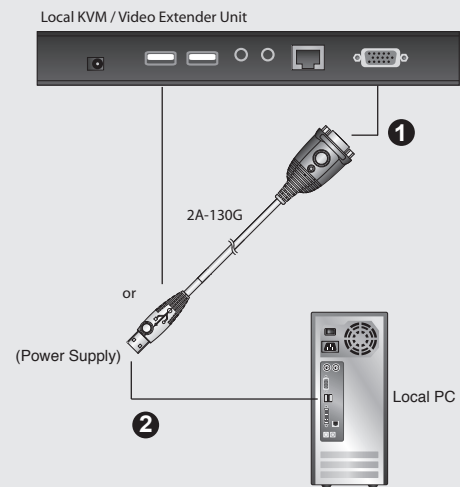

## Hardware Review A

The 2A-130G is designed for ATEN KVM extender or video extender installations that do not utilize a local monitor at the site where the computer/video source is located. The 2A-130G emulates and stores a default ATEN EDID (Extended Display Identification Information) so that the local PC can boot with no problems.

1. Plug the 2A-130G's VGA connector into the local monitor's VGA port on your local KVM extender or video extender unit.
2. Plug the 2A-130G's USB connector into any available USB port on your local Extender or computer. This provides power to the 2A-130G.

**Note:** The 2A-130G takes power from the VGA port and the power LED should light up. If the VGA port cannot provide power, connect the 2A-130G to the USB port on your local Extender or computer.

3. Connect the rest of your ATEN KVM extender or video extender installation according to the installation instructions in the Quick Start Guide.

### Compatible devices:

The 2A-130G works with the following ATEN KVM extenders, video extenders and video splitters:

Compatible Extenders: CE774, CE775, CE700A, CE750, CE770, CE800B, CE350, CE370, CE250A, CE252, VE150A, VE170, VE200, VE300T, VE500T

Compatible Splitters (Connect to Port1): VS132A/134A/138A, VS92A/94A/98A, VS82/84/88, VS0116, VS132, VS102, VS1204T, VS1208T, VS1504, VS1508

## Supported Resolutions B

Standard Timings Supported
640 x 480 at 60Hz Industry STD
800 x 600 at 60Hz VESA
1024 x 768 at 60Hz VESA
1366 x 768 at 60Hz VESA
Extra Timings Supported
1280 x 720p at 60Hz – CEA STD
1280 x 800 at 60Hz – VESA STD
1280 x 1024 at 60Hz – VESA STD
1440 x 900 at 60Hz – VESA STD
1600 x 1200 at 60Hz – VESA STD
1680 x 1050 at 60Hz – VESA STD
1920 x 1080p at 60Hz – CEA STD
1920 x 1200 at 60Hz – VESA STD