

UNIVERSAL SERIAL BUS HUB



USER MANUAL

UH-9124

Read this manual thoroughly and follow the installation and operation procedures carefully to prevent any damage to the unit, and/or any of the devices connected to it.

This package contains:

- 1 USB Hub
 - 1 USB 2.0 Cable
 - 1 DC 5V 2.6A Power Adapter
 - 1 User Manual
- If anything is damaged or missing, contact your dealer.

© Copyright 2000 ATEN™ International Co., Ltd.
Manual Part No. PAPE-1121-500
Printed in Taiwan 06/2000

All brand names and trademarks are the registered property of their respective owners.

SPECIFICATIONS

Function	Specification
Root (Upstream) Ports	1
Downstream Ports	4
LEDs	1
Power Mode	4 (Status / Overcurrent Detection)
Power Consumption	Bus/Self Powered
Output Voltage (per port)	+6V DC (100mW)
Output Current (per port)	+5V DC
Operating Temperature	500mA (max)
Storage Temperature	5 - 40° C
Humidity	-20 - 60° C
Housing	0 - 80% RH
Weight	Plastic
Dimensions (L x W x H)	80 g
	95 x 64 x 22 mm


LIMITED WARRANTY

IN NO EVENT SHALL THE DIRECT VENDOR'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, DISK, OR ITS DOCUMENTATION.

The direct vendor makes no warranty or representation, expressed, implied, or statutory with respect to the contents or use of this documentation, and especially disclaims its quality, performance, merchantability, or fitness for any particular purpose.

The direct vendor also reserves the right to revise or update the device or documentation without obligation to notify any individual or entity of such revisions, or update. For further inquiries, please contact your direct vendor.

CABLE CONNECTION

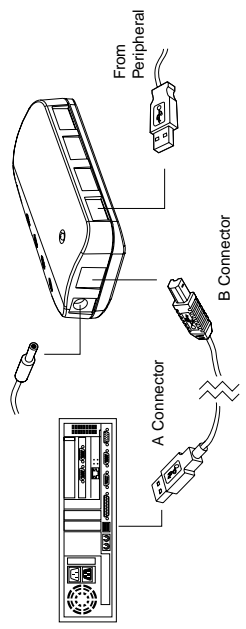

1. Plug the Power Adapter into an AC source, then plug the Power Adapter Cable into the unit's Power Jack.
2. Plug the B Connector end of the USB cable into the Root (Upstream) Port located on the rear panel of the unit.
3. Plug the A Connector end of the USB cable into the USB Host Controller Port of your computer system. If you are daisy chaining hubs, plug the A Connector end of the cable into one of the Downstream Ports of its parent hub.
4. Plug the cables from the USB peripherals into any available Downstream port on the hub.

TROUBLESHOOTING

Problem	Cause	Action
Erratic Operation	Static electricity may cause the unit to operate erratically.	Reset the unit by unplugging the Upstream cable from the computer's USB port and then reinserting it. If you have daisy chained hubs, do this on the hub that connects directly to the computer.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instruction manual, may cause interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna;
- Increase the separation between the equipment and receiver;
- Connect the equipment into an outlet on a circuit different from that which the receiver is connected;
- Consult the dealer or an experienced radio/television technician for help.

OVERVIEW

Universal Serial Bus (USB) port technology has emerged in response to the proliferation of external peripheral devices (scanners, digital cameras, removable drives, etc.), that are increasingly being connected to the latest generation of computers. The USB behaves in a similar fashion to conventional bus ports (i.e., serial, parallel, PS/2), but since it does not require any IRQs, more devices can be attached to the system, and the problem of IRQ conflict is eliminated.

Since many older computers don't have USB connectors on board and most new computers come with only one or two USB ports, USB hubs have been developed to provide a means to connect up all the USB peripherals that users may want to use.

The UH-9124 is a four port USB hub that serves as a cable concentrator and bridge between the computer's USB Host Controller, and USB peripheral devices attached to the system.

The UH-9124 provides four Downstream ports for USB devices to plug into, with LED indicators to display information about power status and overcurrent detection for each port. It supports both full speed (12 Mbps) and low speed (1.5 Mbps) devices, such as keyboards, mice, joysticks, etc., and can be daisy chained to provide as many ports as the user requires.


SYSTEM REQUIREMENTS

1. A USB Host Controller installed on the computer
2. Any OS that supports the USB. For example:
 - Windows 98; Windows 2000
 - Mac OS 8.6 and higher
 - OS/2 Warp (with USB driver installed)

FEATURES


- Mac and Windows USB Specification Compatible
- Hot Pluggable (USB Devices Can Be Plugged and Removed Without Having to Reset the System)
- Four Downstream Ports with Per Port Overcurrent Detection and Protection
- Per Port Bus Status LED Indicators
- Bus/Self Powered

FRONT VIEW



1. Power LED
Lights when the unit is receiving power from the power adapter.
2. Port LEDs (1-4)
 - A Port LED lights when the downstream peripheral device connected to its corresponding port is receiving power at the correct current level.
 - If an overcurrent condition between the unit and the downstream device occurs, the LED turns AMBER.
3. Power Jack
The Power Adapter cable plugs in here.
4. Root (Upstream) Port
The cable that connects the hub to the computer's USB Host Controller plugs in here.

REAR VIEW

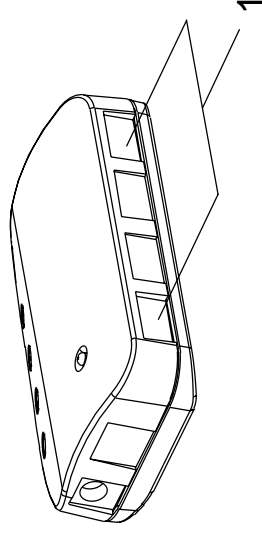

1. Downstream Ports (1 - 4)
Cables from USB peripherals can plug into any available port.