


## 참고 자료 - ATEN UPS Runtime Table

배터리 \ 로드 (Watt)	100	200	300	400	500	600	700	800	900	1000 (Full Load)
OL1000	63.67	29.90	18.52	12.92	9.44	7.04	5.36	4.24	3.60	3.10
OL1000 + (1)BP24V18AH	232.85	115.96	73.19	52.07	39.53	31.21	25.44	21.48	18.67	16.46
OL1000 + (2)BP24V18AH	411.22	211.88	136.95	98.91	75.77	60.13	49.20	41.07	36.68	32.51
OL1000 + (3)BP24V18AH	590.98	309.92	203.27	148.50	114.77	91.71	75.39	64.48	56.56	50.31
OL1000 + (4)BP24V18AH	771.24	408.75	270.61	199.28	155.07	124.64	102.95	88.25	77.65	69.24

OL1000 실행 시간 차트



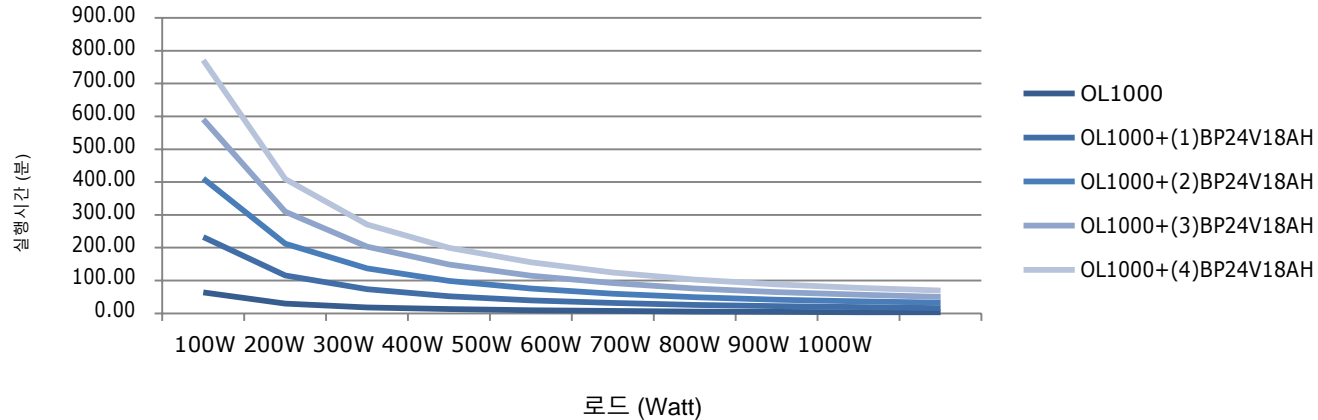


# ATEN UPS Runtime Table (OL1500)




로드 (Watt)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500 (Full Load)	
배터리																
OL1500	101.18	42.43	29.44	21.16	16.04	12.89	10.32	8.56	7.06	5.90	5.03	4.44	3.99	3.62	3.30	
OL1500 + (1)BP36V18AH	353.79	160.83	114.27	83.23	63.77	51.98	42.66	36.46	31.30	27.31	24.37	22.05	20.12	18.47	17.07	
OL1500 + (2)BP36V18AH	614.81	288.96	208.96	154.75	120.11	98.75	81.59	70.02	60.31	52.73	47.24	42.91	39.28	36.20	33.54	
OL1500 + (3)BP36V18AH	876.85	418.86	305.78	228.71	179.09	148.26	123.30	106.32	91.97	80.68	72.43	65.98	60.55	55.93	51.94	
OL1500 + (4)BP36V18AH	1139.24	549.41	403.40	303.63	239.17	198.97	166.28	143.95	124.98	110.01	98.78	90.16	82.90	76.70	71.34	

OL1500 실행시간 차트

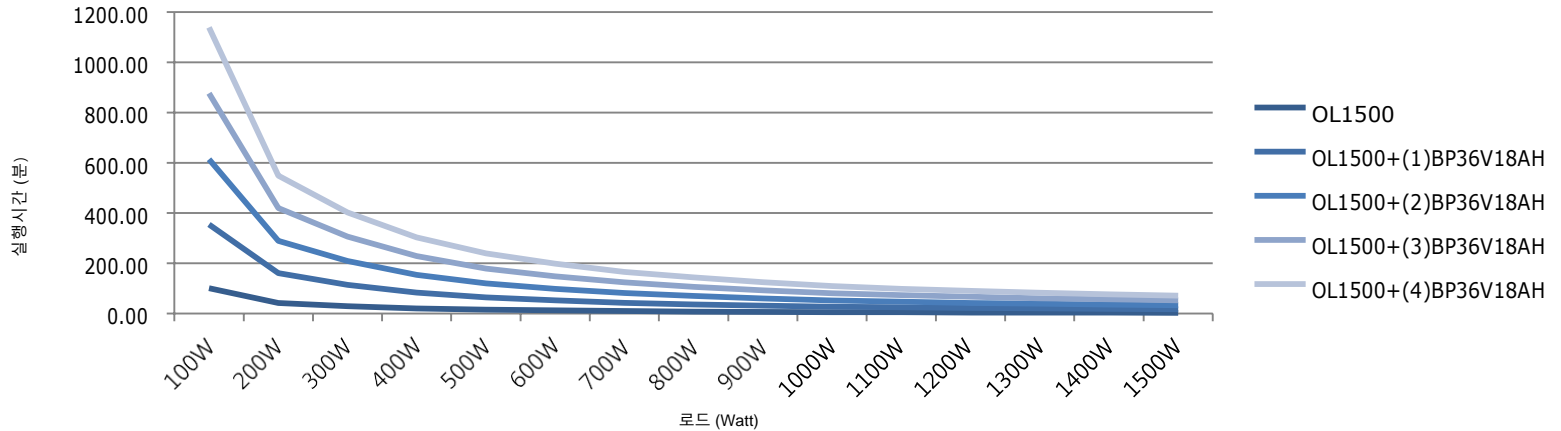

로드 (Watt) 배터리	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000 (Full Load)
OL2000	158.61	68.38	44.86	31.06	24.18	19.12	15.83	13.20	11.19	9.56	8.22	7.13	6.04	5.31	4.74	4.34	3.99	3.69	3.42	3.19
OL2000 + (1)BP48V18AH	532.54	248.37	169.30	120.21	94.67	75.46	62.96	53.12	45.75	39.96	35.29	31.54	27.89	25.51	23.48	21.73	20.20	18.86	17.67	16.62
OL2000 + (2)BP48V18AH	914.21	437.43	303.42	219.24	174.85	141.00	118.65	100.84	87.31	76.56	67.83	60.76	53.74	49.33	45.54	42.27	39.41	36.89	34.65	32.66
OL2000 + (3)BP48V18AH	1296.61	627.82	439.24	320.34	257.34	209.06	177.00	151.28	131.64	115.93	103.10	92.64	82.09	75.43	69.80	64.92	60.64	56.87	53.51	50.52
OL2000 + (4)BP48V18AH	1679.26	818.68	575.70	422.22	340.73	278.13	236.45	202.92	177.22	156.60	139.70	125.87	111.88	103.00	95.47	88.93	83.19	78.12	73.61	69.57

OL2000 실행시간 차트

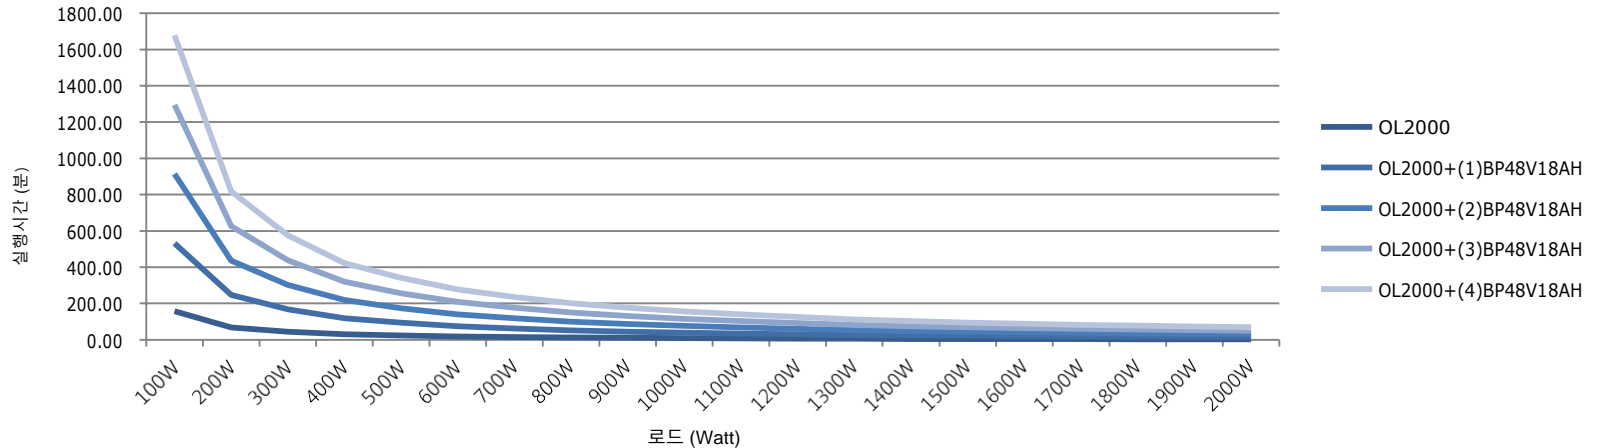




# ATEN UPS Runtime Table (OL3000)



로드 (Watt) 배터리	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
OL3000	237.54	114.08	72.53	54.70	41.17	32.61	27.48	23.16	19.90	17.26	15.21	13.51	12.08	10.85	9.79
OL3000 + (1)BP72V18AH	773.41	394.42	261.97	202.91	156.40	125.85	107.01	90.81	78.43	68.39	60.62	54.27	48.99	44.55	40.77
OL3000 + (2)BP72V18AH	1316.67	682.97	460.37	360.54	281.40	228.97	196.37	168.09	146.27	128.41	114.44	102.92	93.27	85.09	78.07
OL3000 + (3)BP72V18AH	1860.46	972.45	660.06	519.70	408.20	334.12	287.91	247.71	216.59	191.01	170.94	154.30	140.32	128.41	118.15
OL3000 + (4)BP72V18AH	2404.43	1262.25	860.20	679.41	535.66	440.02	380.30	328.26	287.91	254.68	228.55	206.86	188.58	172.98	159.52

로드 (Watt) 배터리	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000 (Full Load)
OL3000	8.86	8.05	7.33	6.57	6.02	5.53	5.19	4.89	4.61	4.37	4.14	3.94	3.75	3.57	3.41
OL3000 + (1)BP72V18AH	37.52	34.70	32.23	29.76	28.01	26.44	25.02	23.74	22.57	21.50	20.53	19.63	18.80	18.04	17.33
OL3000 + (2)BP72V18AH	72.00	66.71	62.05	57.37	54.11	51.19	48.55	46.16	43.98	41.98	40.15	38.46	36.90	35.46	34.11
OL3000 + (3)BP72V18AH	109.24	101.44	94.55	87.38	82.55	78.21	74.29	70.72	67.47	64.49	61.75	59.22	56.88	54.72	52.70
OL3000 + (4)BP72V18AH	147.80	137.51	128.41	118.69	112.23	106.44	101.20	96.43	92.08	88.09	84.42	81.04	77.90	74.99	72.28

OL3000 실행시간 차트

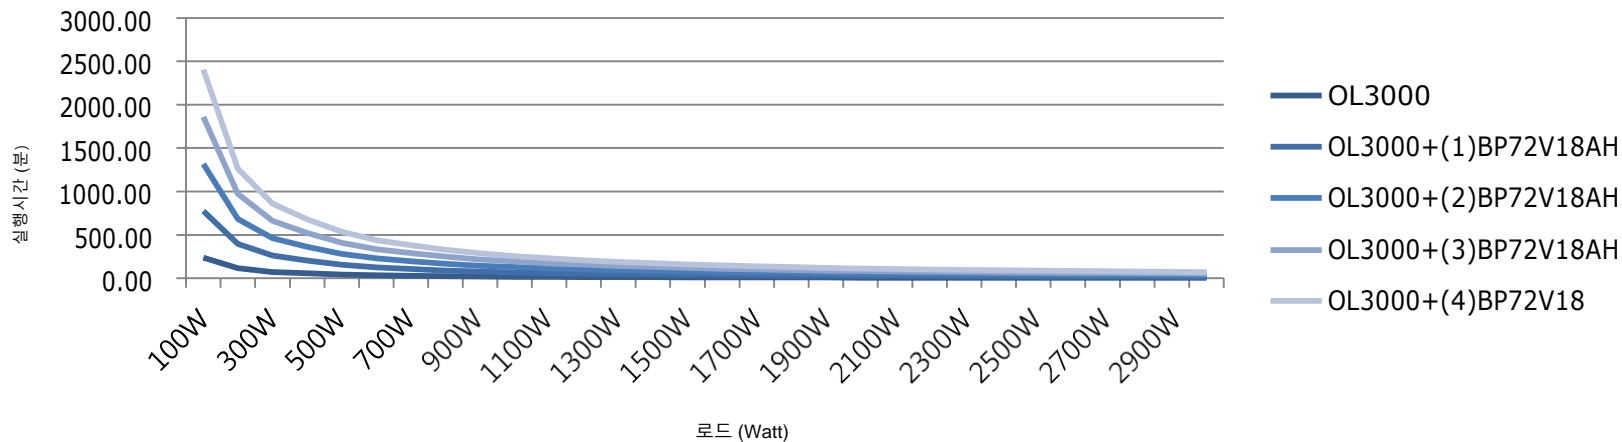



Simply Better Connections

모든 무단 검토, 복사, 공개, 사용 또는 배포를 엄격히 금지합니다.