



**VK330A**

**10.1" Touch Panel Gen. 2  
Quick Start Guide**

© Copyright 2026 ATEN® International Co. Ltd.

ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.

All rights reserved. All other trademarks are the property of their respective owners.

Released: 01/2026

## Package Contents

- 1 VK330A 10.1" Touch Panel Gen. 2
- 1 90° RJ-45 cable adapter
- 1 user instructions

## Contents

Hardware Overview	3
Mounting the VK330A	4
Wall Mount	4
Desk Mount	4
Installation	5
Software Configuration	5
Adding Viewers to the ATEN Control System App	5
Configuring the Network Settings	5
Operation	5

## Scan for more information



Product Page



User Manual

### Support and Documentation Notice


All information, documentation, firmware, software utilities, and specifications contained in this package are subject to change without prior notification by the manufacturer.

To reduce the environmental impact of our products, ATEN documentation and software can be found online at : <http://www.aten.com/download/>

### Technical Support

[www.aten.com/support](http://www.aten.com/support)


## A Hardware Overview

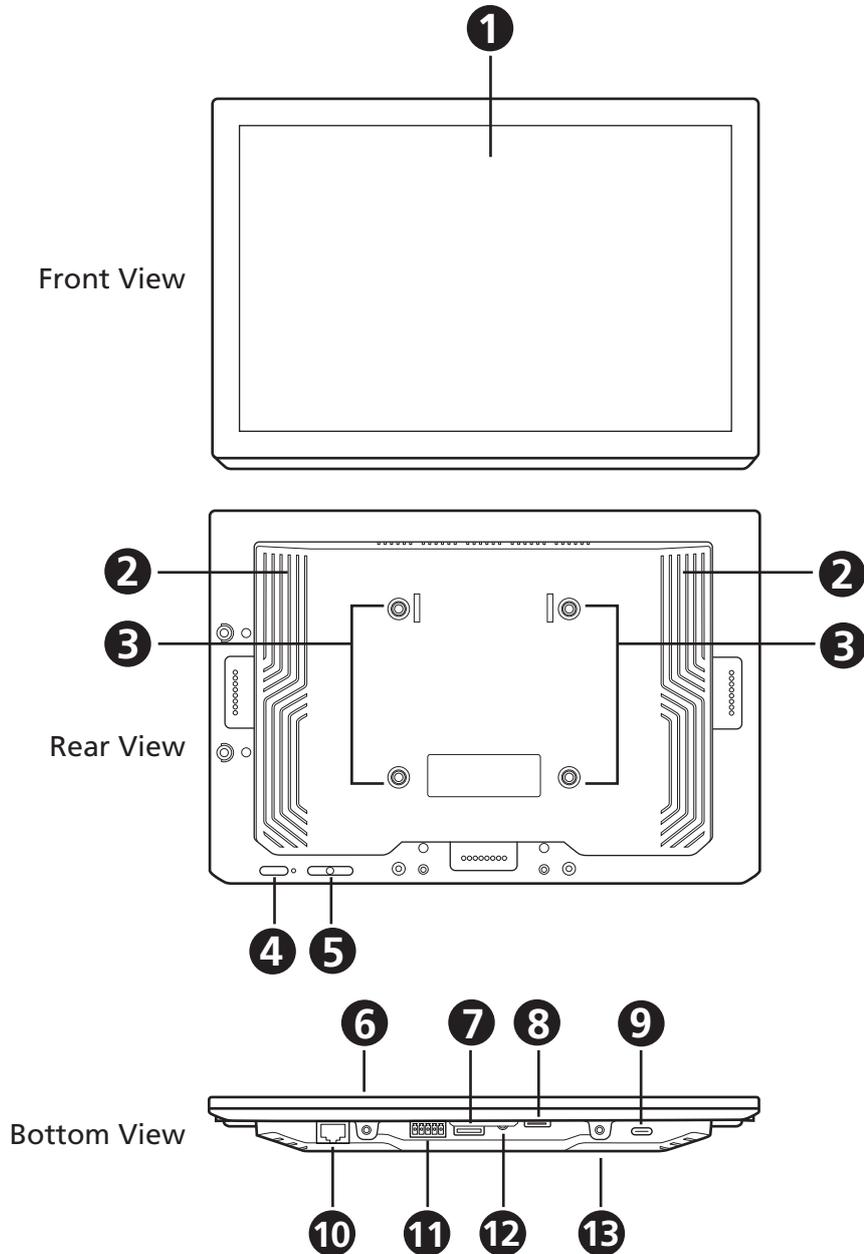


- |                               |   |
|-------------------------------|---|
| 1 touch panel                 | 8 mini-HDMI out                                     |
| 2 speakers                    | 9 USB-C port  |
| 3 screw holes for panel plate | 10 LAN port with PoE                                |
| 4 power button                | 11 RS-485 serial port (for debugging purposes only) |
| 5 volume +/-                  | 12 stereo audio out                                 |
| 6 SD card slot                | 13 power jack                                       |
| 7 USB Type-A port             |   |

## **B** Mounting the VK330A

### Wall Mount

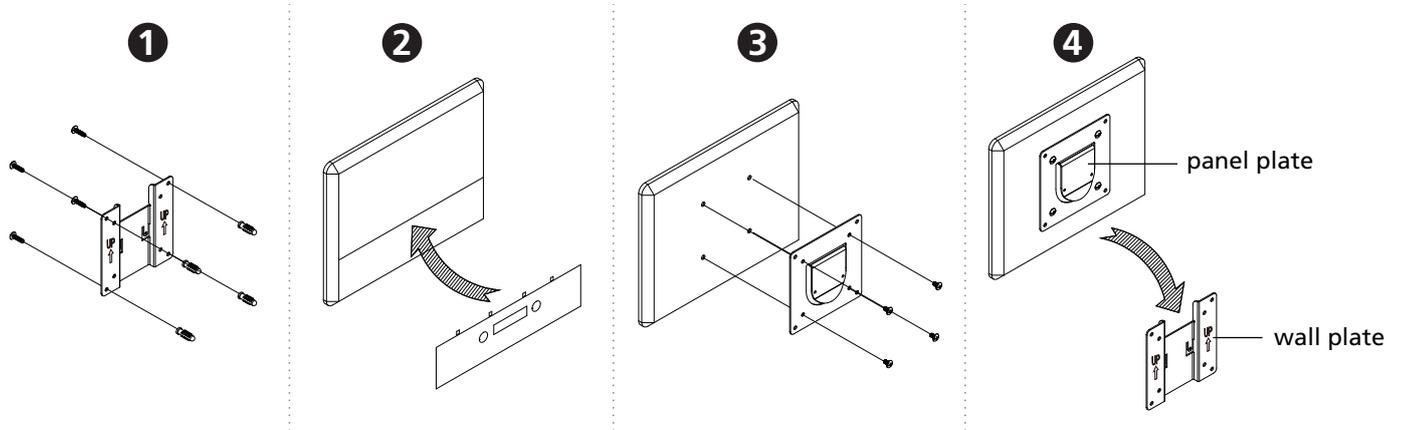

### Desk Mount



**Note:** Accessories for wall mount (VK302) and desk mount (VK304) installations are available for purchase. For more information, visit the VK330A product web page.

The VK330A Touch Panel Gen. 2 supports desk mount, wall mount, or any third-party mounting accessory that is VESA-compliant (75 mm x 75 mm). For more information about compatible accessories, visit the VK330A product page. To mount the VK330A to the wall using ATEN wall mount accessory, follow the steps below.

- 1** Secure the wall plate to the wall using the wall anchors and screws.
- 2** Attach the matt cable cover to the VK330A.
- 3** Secure the panel plate to the VK330A using the M4 screws.
- 4** Slide the panel plate to the wall plate.

## **C** Installation

1. Using the 90° RJ-45 cable adapter provided and an Ethernet cable, connect the unit to a PoE switch / injector to provide power and access to the network.
2. Now the VK330A is powered on.

## **D** Software Configuration

### **Adding Viewers to the ATEN Control System App**

1. After turning on the VK330A, wait for the ATEN Control System welcome page to appear.
2. Tap **Start**. The Download Viewer page appears.
3. Search for controllers and add Viewers that you have created. For more information about the ATEN Control System app, refer to the *ATEN Control System Software Guide*.

### **Configuring the Network Settings**

To configure the network settings:

1. Tap **Settings** icon (the second one from the right) on the bottom menu of the VK330A to access the settings.
2. Tap **Network & Internet > Ethernet** to configure the network settings.

## **E** Operation

- To return to the settings page, press the **power button** for 5 seconds.
- To return to the ATEN Control System app from the settings page, tap **Return to ATEN Control System App**.