VR103


Glass Wall Mount Kit

Installation Guide


Package Contents

Qty	Description
1	side mount bracket
1	trim plate
1	wall mounting screw kit
1	bracket mounting screw kit (for the VK302 Wall Mount Kit)
1	bracket mounting screw kit (for the wall mount included in the VR440)
1	trim plate mounting screw kit
1	foam sponge pack
1	user instructions


Hardware Overview

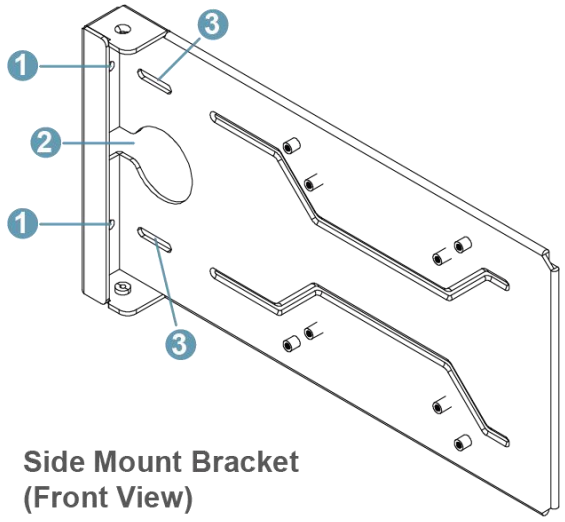

Side Mount Bracket
(Front View)

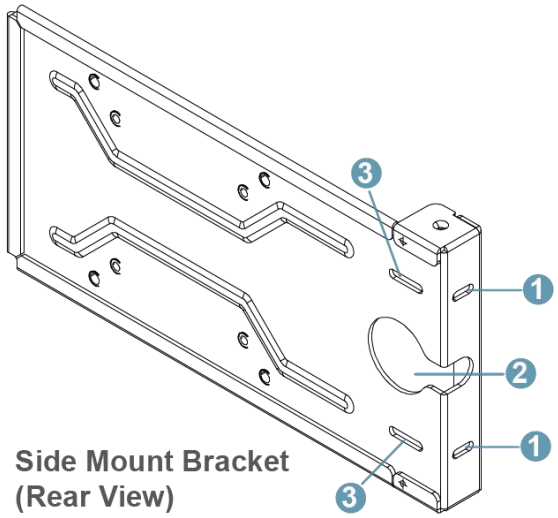

Side Mount Bracket
(Rear View)

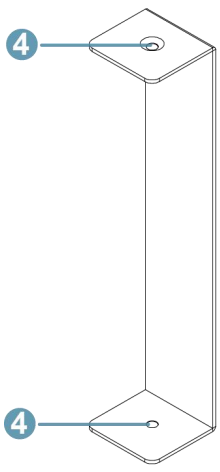

Trim Plate

1. side mounting slots
2. cable routing hole
3. front mounting slots
4. trim plate mounting holes

Installation

1. Depending on the installation position, secure the side mount bracket to the installation site through the appropriate mounting slots using two supplied wall mounting screws, as shown below.

   Note: If there is a gap between the side mount bracket and the wall, apply the supplied foam sponge to the rear side of the side mount bracket as needed to cushion contact between the bracket and the wall during operation.

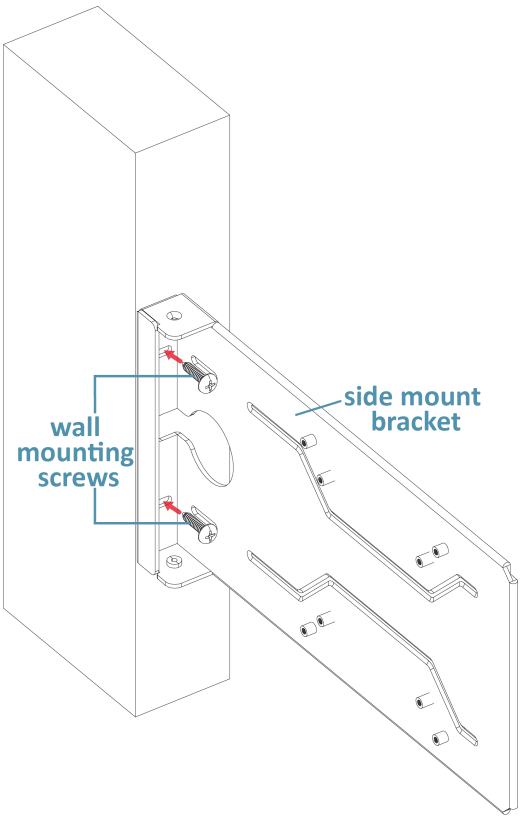


Fig. 1-1: Side-Mount Installation

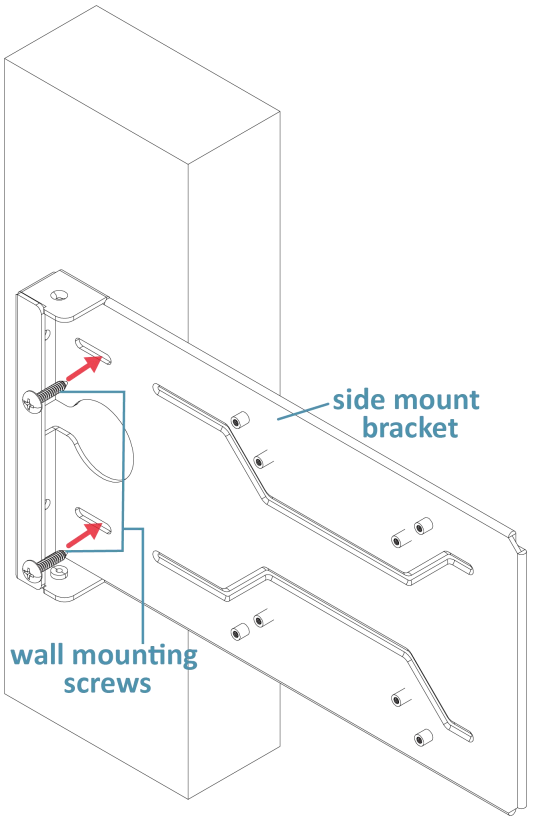


Fig. 1-2: Front-Mount Installation

◆ For VK302 Wall Mount Kit

2. Secure the wall plate of the VK302 Wall Mount Kit to the side mount bracket using the supplied bracket mounting screws (for the VK302 Wall Mount Kit).

   Note: The VK302 Wall Mount Kit is not included in the VR103 package.

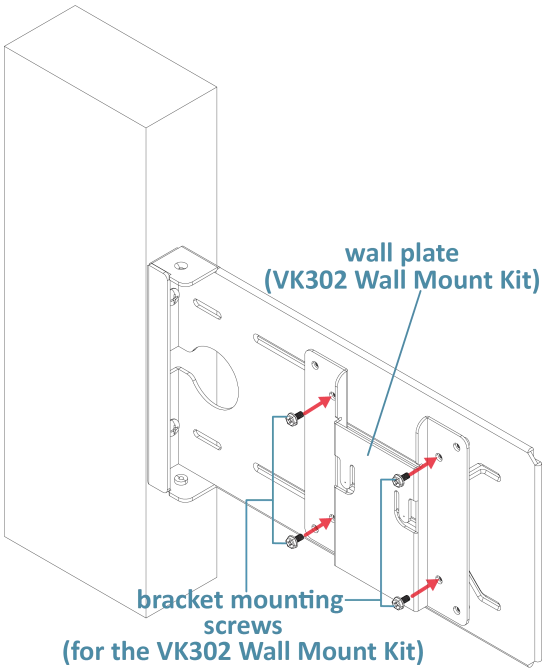


Fig. 2-1: Mounting the VK302 Wall Plate to the Side Mount Bracket

3. Align the panel plate attached to the device with the wall plate, and slide the device into place to secure it.
   Proceed to step 5 to complete the installation.

   Note:

   - The VK302 Wall Mount Kit can be used with the VK430, VK330, VK330A, or any panel with a VESA 75 × 75 or 100 × 100 mounting pattern.
   - For instructions on attaching the VK302 panel plate to the device, refer to the VK302 product page for details.

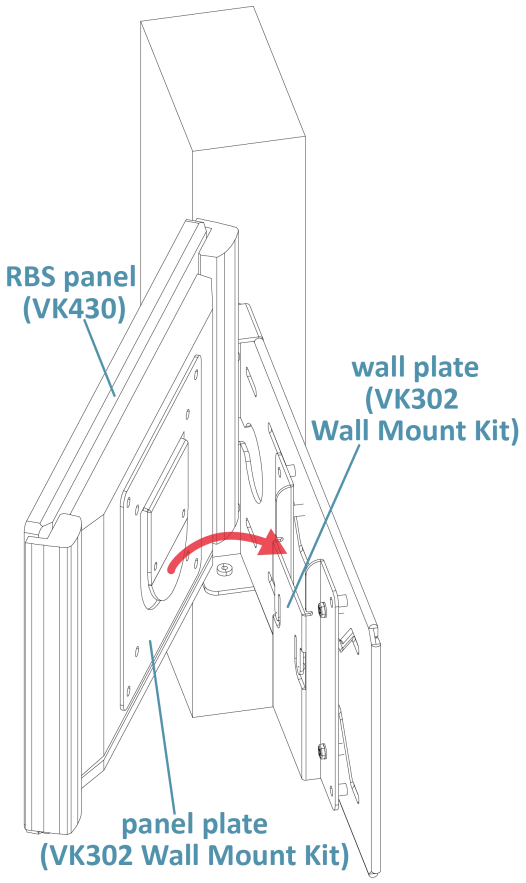


Fig. 3-1: Mounting the Device to the Wall Plate

For the VR440

2. Secure the wall plate included in the VR440 to the side mount bracket using the supplied bracket mounting screws (for the VR440 wall mount).

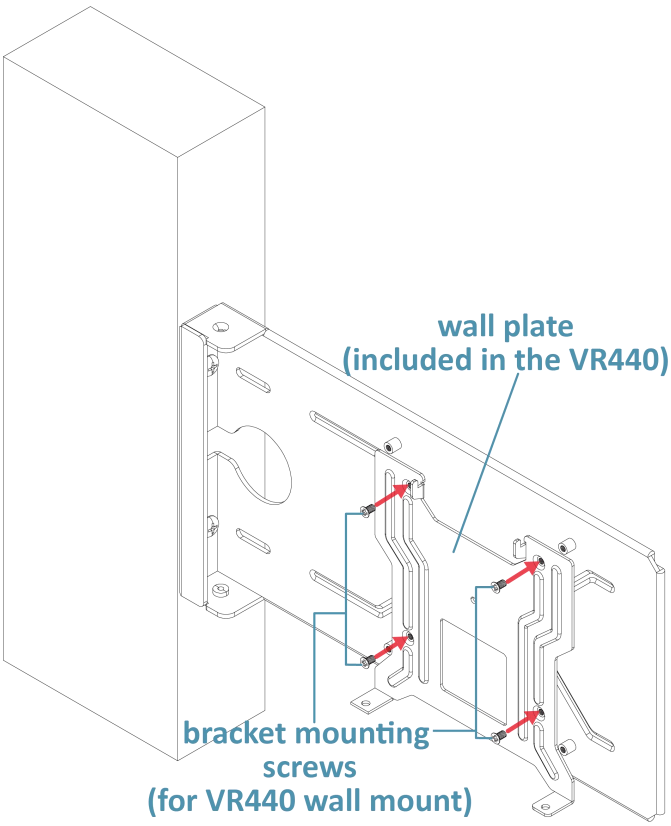


Fig. 2-2: Installing the VR440 Wall Plate

3. Align the two hook slots on the back of the VR440 with the hooks on the wall plate, and lower the VR440 onto the hooks to secure it in place.

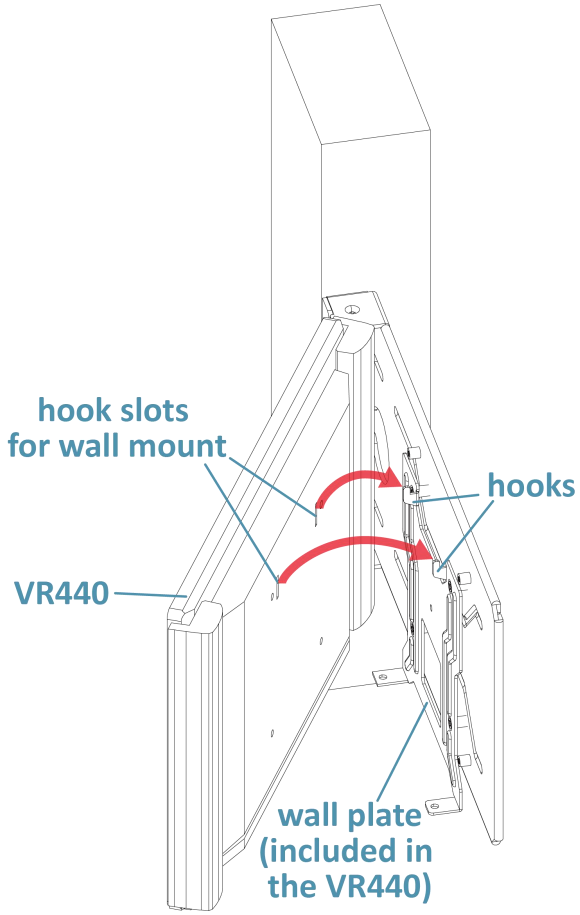


Fig. 3-2: Mounting the VR440 to the Wall Plate

4. Secure the VR440 to the wall plate through the two mounting tabs using the wall mount screws included with the VR440.

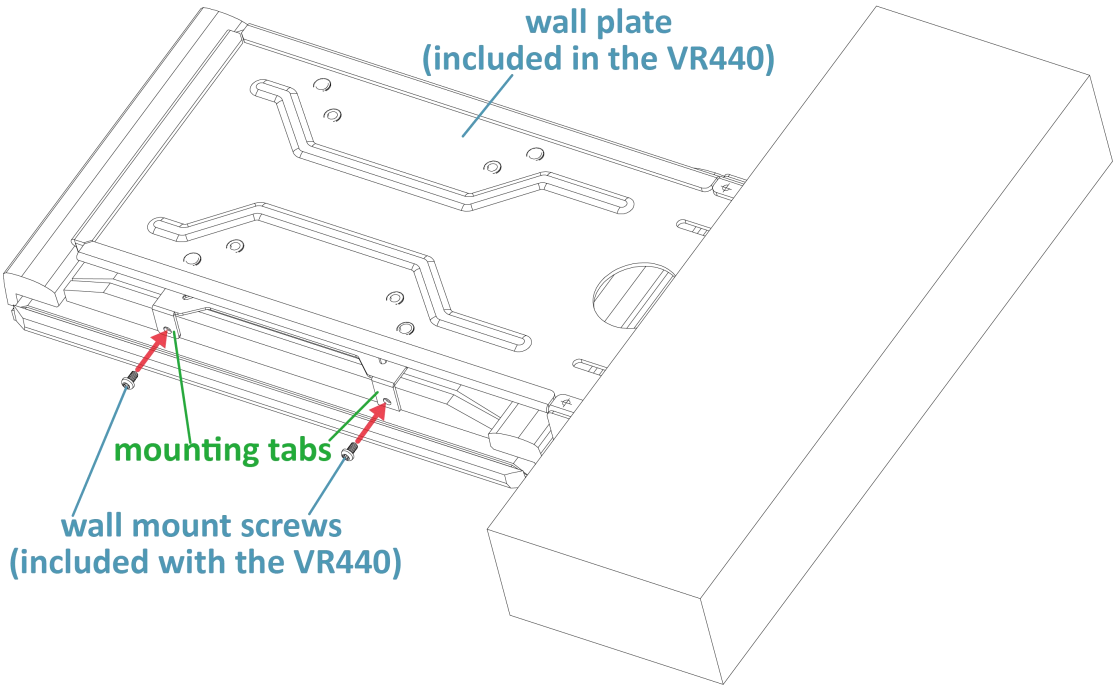


Fig. 4: Securing the VR440 to the Wall Plate

5. Attach the trim plate to the side mount bracket using the supplied trim plate mounting screws.

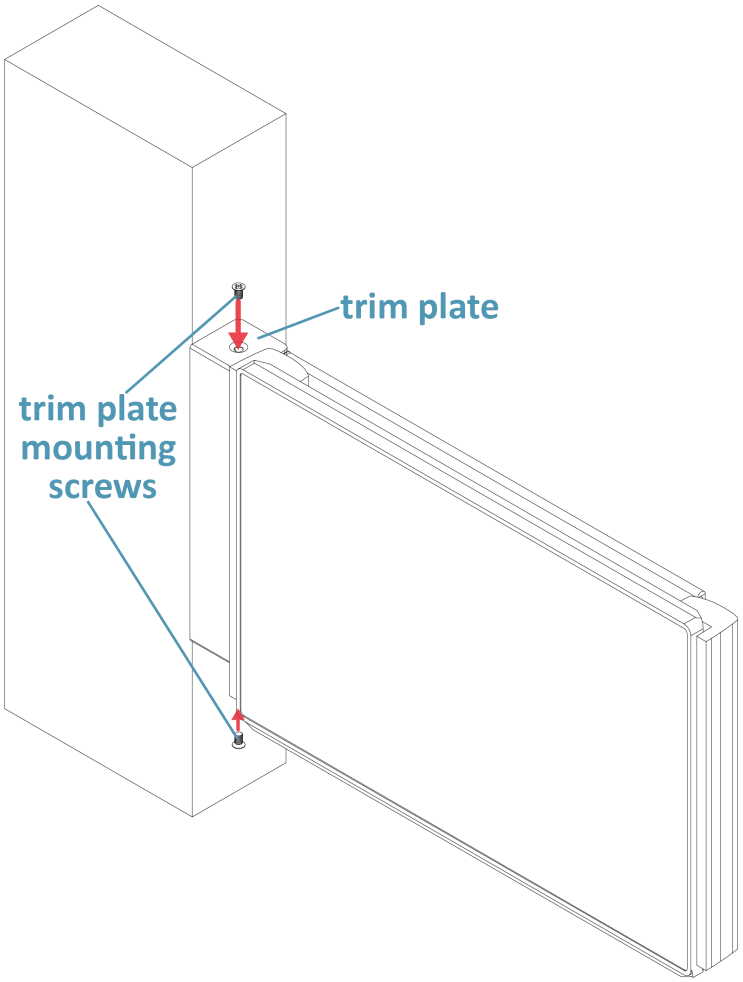


Fig. 5: Installing the Trim Plate

Scan to access more information:

VR103 Product Page

VK302 Product Page

VR440 QSG