

# VW754

## 4-Channel 4K H.265 IP Stream Decoder Input Card

### Installation Guide




MISC10000075 07/2025 V1.0

### Package Contents

| Qty | Description   |
|-----|---|
| 1   | VW754 4-Channel 4K H.265 IP Stream Decoder Input Card |
| 1   | user instructions                                     |

### Hardware Overview


#### • VW754 Front View

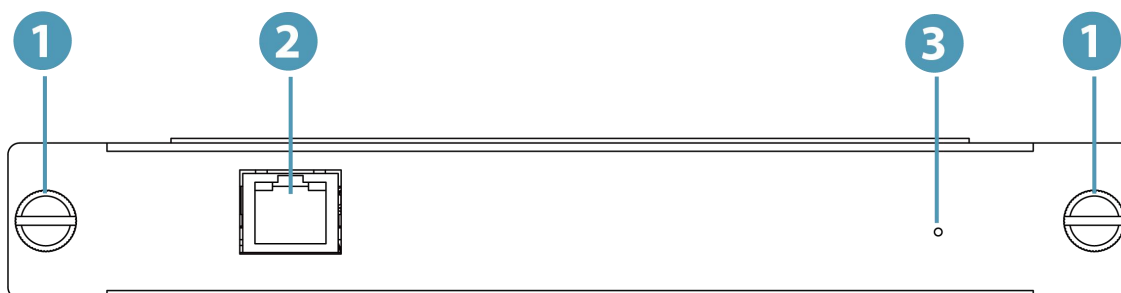

| No. | Component   | Description   |
|-----|-------------|---|
| 1   | thumbscrews | Hand-tightened screws with ridged heads, used to secure components without tools.                       |
| 2   | LAN port    | A Gigabit Ethernet port used to receive H.265 IP video streams from network sources such as IP cameras. |
| 3   | status LED  | A green LED that indicates the unit is operating normally.  |

### Installing the VW754 Streaming Card into the VW3620 Video Wall Processor

1. Remove the cover from the input board slot on the VW3620 unit.

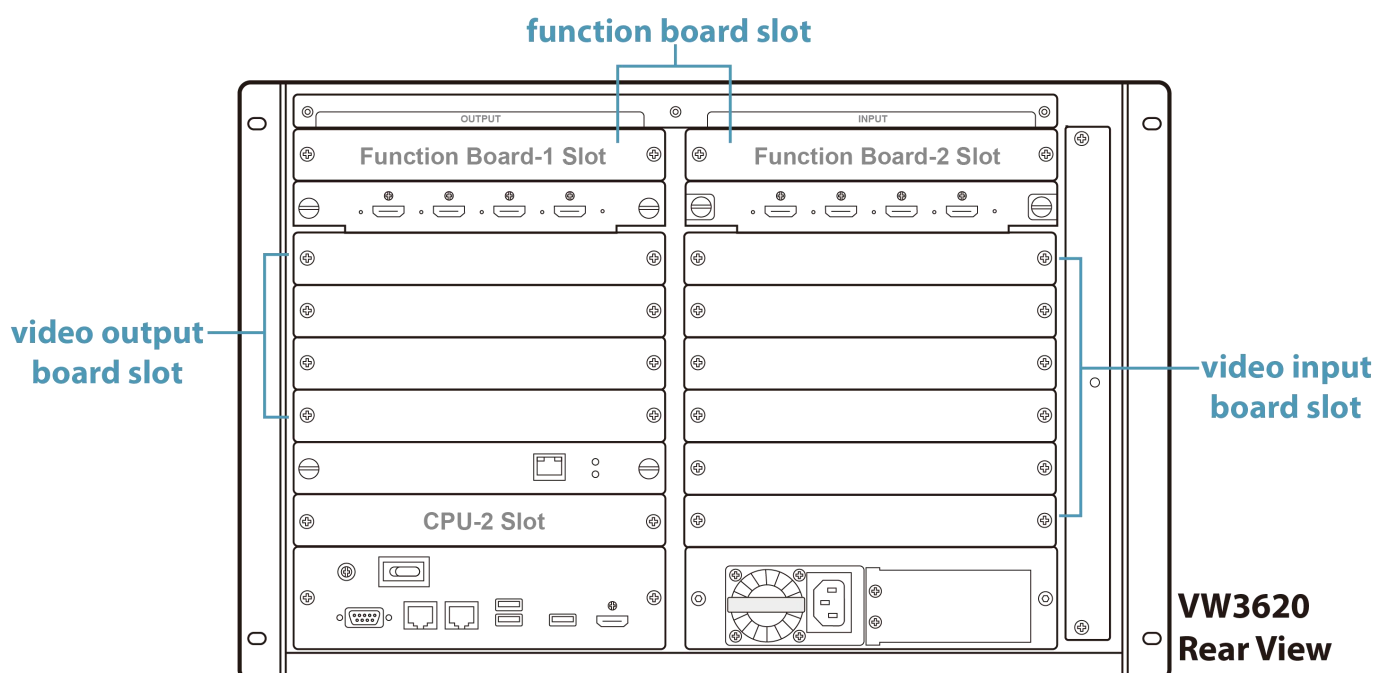

2. Insert the VW754 streaming card into the input board slot of the VW3620.
3. Gently push the VW754 streaming card until it is fully seated in the slot.
4. Press down on each thumbscrew head to position it, then tighten by turning it clockwise.
5. Repeat the steps to install additional VW754 streaming cards as needed.

**Note:** Up to five VW754 streaming cards can be installed.

## Removing the VW754 Streaming Card

1. Loosen the thumbscrews alternately.
2. Hold both thumbscrews and gently pull out the VW754 streaming card.

