

High Speed HDMI Cable with Ethernet (0.3 m / 0.6 m)


2L-7DA3H / 2L-7DA6H

- ATEN High Speed HDMI Cable with Ethernet provides an uncompressed, all-digital interface for both audio and video signals, guaranteeing reliable digital signal transmission up to 4K (4096 x 2160 / 3840 x 2160 @ 30 Hz). Our cables infuse high-quality tinned copper wire to resist interference for better-defined video and image quality.

HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE

4K 4096x2160


4K 3840x2160

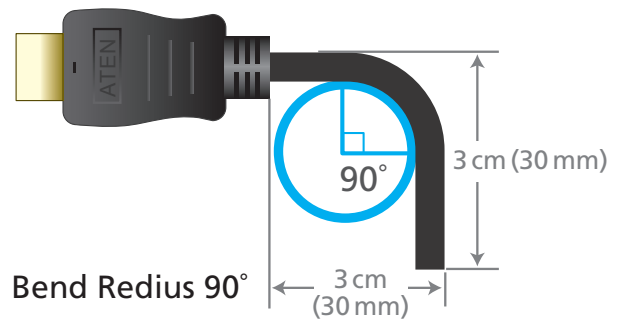

Specifications

Function	2L-7DA3H	2L-7DA6H
Video Resolution	Up to 4096X2160 @ 30Hz	
Physical Properties		
Cable Length	0.3 m	0.6 m
Cable Color	Black	
Cable Outer Dimension	6.0 +/- 0.15mm	
Conductor Gauge	30AWG	
Conductor Material	Tinned Copper	
Connector Plating	Gold	
Connector Type	HDMI (19 pin) Male to Male	
Cable Shield Type	Aluminum Foil	
Cable Jacket Type	PVC	
Environmental		
Operating Temperature	80°C	
Rating	UL VW-1 (Flame rate), CSA	

Part No.	Length
2L-7DA3H	0.3 m
2L-7DA6H	0.6 m



Gold-plated connectors

Features

- Optimum signal transmission up to 4K (4096 x 2160 / 3840 x 2160 @ 30 Hz) and standard 1920 x 1080 @ 60 Hz
- HDMI Ethernet Channel functionality: additional dedicated data channel supports networking*
- HDMI (3D, Deep Color, 4K); HDCP 2.2 compliant
- Gold-plated connectors for reliable transmissions
- Available in 0.3 and 0.6 m
- Bend Radius 90° **

Note:

* Feature only available if linked devices are HDMI Ethernet Channel enabled

** Swings 100 times between angles of +/- 90 degrees, at a frequency of 13 times per minute

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Publish Date: 05/2017 V2.0



© Copyright 2017 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.