

# CS64US




## 4-Port USB KVM Switch

The CS64US takes a giant step forward from prior cable KVM models in the Petite series, by offering built-in cables, USB peripheral sharing, and a firmware upgrade function that allows you to keep up with latest available versions.

Furthermore, the CS64US features enhanced Video DynaSync™ technology, which stores the console monitor's EDID (Extended Display Identification Data) to optimize display resolution. The CS64US also offers multiplatform support and computer selection via hotkeys to provide the ultimate in desktop convenience.

### Setup

**PETITE™**

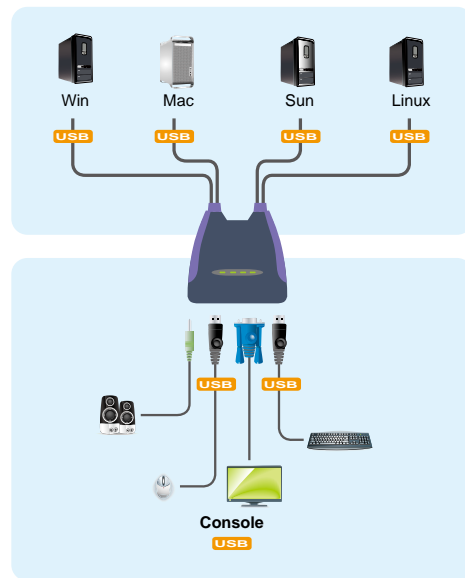

### Features

- One USB console controls four USB computers
- USB mouse port can be used for USB 1.1 hub and USB 1.1 peripheral sharing
- Computer selection via hotkeys
- Select OS via Hotkey
- Audio-enabled
- Multiplatform support – Windows, Linux, Mac and Sun
- Compact design, built-in 0.9/1.2m cables
- Superior video quality – up to 2048 x 1536; DDC2B
- Video DynaSync™ – Exclusive ATEN technology eliminates boot-up display problems and optimizes resolution when switching between ports
- Supports multimedia keyboards
- Supports wireless keyboards and mice
- Supports multifunction mice
- Sun/Mac keyboard support and emulation\*
- Auto Scan function to monitor computer operation
- Non-Powered
- Firmware upgradable

\* 1. PC keyboard combinations emulate Sun/Mac keyboards  
2. Sun/Mac keyboards only work with their own computers

### Specifications

Function		CS64US	
Computer Connections		4	
Port Selection		Hotkeys	
Connectors	Console Ports	Keyboard	1 x USB Type A Female (White)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x USB Type A Female (White)
		Speaker	1 x Mini Stereo Jack Female (Green)
	KVM Ports	Keyboard / Mouse	4 x USB Type A Male (White)
		Video	4 x HDB-15 Male (Blue)
Speaker		4 x Mini Stereo Jack Female (Green)	
LEDs	Selected	4 (Green)	
Cable Length		2 x 0.9 m; 2 x 1.2 m	
Emulation	Keyboard / Mouse	USB	
Video		2048 x 1536; DDC2B	
Scan Interval		1–99 secs. (default 5 secs.)	
Environment	Operating Temp.	0–50°C	
	Storage Temp.	-20–60°C	
	Humidity	0–80% RH, Non-condensing	
Physical Properties	Housing	Plastic	
	Weight	0.77 kg	
	Dimensions (L x W x H)	10.90 x 9.72 x 2.54 cm	

\* The specifications and pictures are subject to change without notice.

## ATEN North America



ATEN Technology  
19641 Da Vinci, Foothill Ranch, CA 92610  
Phone: 888.999.ATEN (2836) Fax: 949.428.1100

ATEN New Jersey - SI/VAR Division  
155 Pierce Street, Somerset, NJ 08873  
Phone: 888.999.ATEN (2836) ext. 2300 Fax: 732.356.1639

Email: sales@aten-usa.com

Website: www.aten-usa.com

