

# 2/4-Port USB 3.0 8K DisplayPort KVMP™ Switch

CS1922A / CS1924A

Built on ATEN's enterprise-grade design heritage, the CS1922A / CS1924A belongs to ATEN's first KVM switch series with 8K support, delivering professional-grade performance and reliable multi-computer control from a single console.

## Ultra-High Resolution for Versatile Professional Applications

The CS1922A / CS1924A delivers up to 8K@60 Hz and 4K@120 Hz, providing precise, clear visuals for demanding tasks. It enables users to control multiple computers from a single console, supporting efficient multitasking and high-resolution workflows while keeping the workspace clean and organized.

## Multi-Display Expansion and Broad Display Compatibility

Daisy-chaining further allows multi-display setups using a single keyboard and mouse, streamlining multi-screen workflows and enhancing productivity for complex tasks. With DisplayPort Dual-Mode (DP++) support, the switch can connect to HDMI or DVI displays via compatible adapters, expanding compatibility with a wide range of monitors.

## Flexible and Intuitive Switching for Efficient Workflows

Multiple switching methods, including front panel pushbuttons, a remote port selector, hotkeys, mouse switching, and RS-232 commands, allow users to control connected computers seamlessly. This flexibility enables fast, efficient workflow management tailored to individual preferences, ensuring smooth transitions between multiple systems.

## Efficient Peripheral Sharing and Easy Installation

The integrated USB 3.1 Gen 1 hub provides 5 Gbps data transfer speeds, enabling fast sharing of peripherals between connected computers. All required DisplayPort and USB cables, along with a power adapter, are included for quick, plug-and-play setup, helping users maintain a clean, organized, and fully functional workspace from the start.



CS1922A



CS1922A Rear View



CS1924A



CS1924A Rear View



## Features

### High-Performance Hardware and Display Capabilities

- Superior video quality – up to 7680 × 4320 @ 60 Hz, 5120 × 2880 @ 60 Hz and 4096 × 2160 @ 120 Hz
- Two USB 3.1 Gen 1 ports with SuperSpeed 5 Gbps transfer rates
- Supports DisplayPort Dual-Mode technology (DP++)<sup>1</sup>
- Supports MST (Multi-Stream Transport)<sup>2</sup>
- DisplayPort 1.4 compliant; HDCP compliant
- Supports HDR 10+
- Supports HD Audio<sup>3</sup>
- Supports Daisy-chaining setup<sup>4</sup>
- Supports hot-plugging

### Comprehensive Management and Switching Controls


- One USB keyboard and mouse control two/four DisplayPort computers and share two USB peripherals
- Computer selection via pushbuttons, remote port selector, hotkeys, mouse<sup>5</sup>, and RS-232 commands
- Independent switching of KVM, USB, and Audio
- Supports Console keyboard/mouse emulation/bypass feature
- Power-on detection automatically switches to the next active computer
- Firmware upgradable
- Multilingual keyboard mapping – supports English, Japanese, French, and German keyboards<sup>6</sup>

### Streamlined, Ready-to-Use Experience

- Plug & play
- All DisplayPort/USB cables and power adapter included for hassle-free installation—no extra purchases needed
- Multiplatform support – Windows, Mac, and Linux

#### Note:

1. DP++ (DP Dual Mode) requires a DP++ adapter (powered DP++ adapter recommended). The graphics source must be DP++ compliant.
2. MST (Multi-Stream Transport) requires monitors capable of DisplayPort 1.4 daisy-chaining or the use of a powered DisplayPort MST hub. The PC source must be DisplayPort 1.4 compliant. A DisplayPort 1.1a or 1.2 display can be the last display in a DisplayPort 1.4 chain.
3. HD audio through HDMI cannot be switched independently.
4. Supports Daisy-chaining setup for dual- or triple-display control - single-display models can connect with single- or dual-display models for dual- or triple-display setups using one keyboard and mouse.
5. For 3-button USB wheel mouse only. Mouse-port switching is supported only under mouse emulation mode.
6. PC keyboard combinations emulate Mac keyboards. Mac keyboards only work with Mac computers.

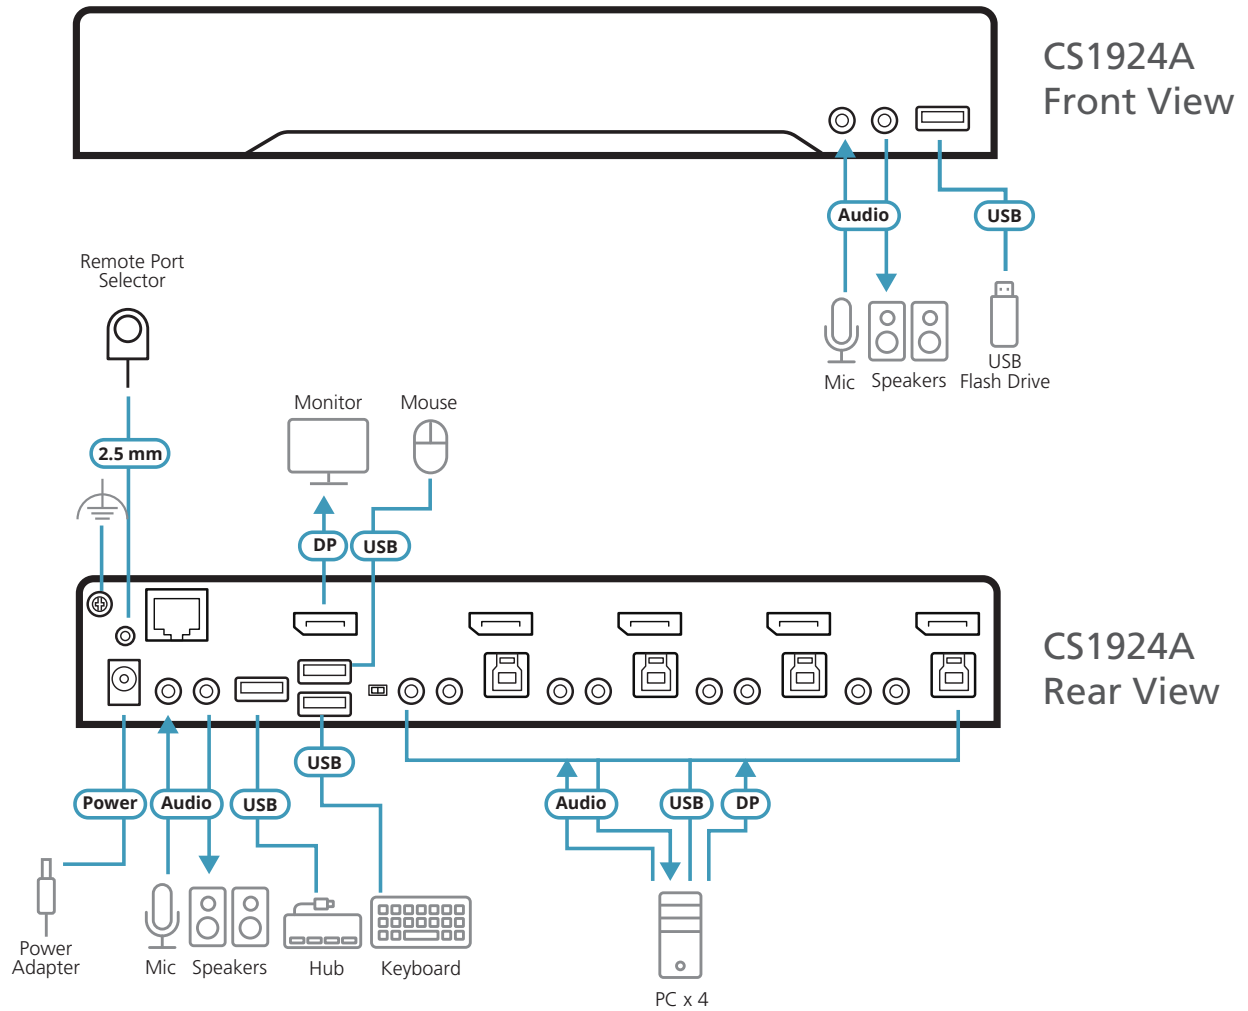

## Specifications

	CS1922A	CS1924A
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton, Mouse wheel, RS-232 Commands, Remote port selector	
Connectors		
Console Ports	2 x USB Type-A Female 1 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear)	
KVM (Computer) Ports	2 x USB 3.1 Gen1 Type-B Female (Blue) 2 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	4 x USB 3.1 Gen1 Type-B Female (Blue) 4 x DisplayPort Female (Black) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Daisy Chain Ports	1 x RJ-45 Female	
Power	1 x DC Jack	
USB Hub	2 x USB 3.1 Gen1 Type-A Female (Blue; 1 x front; 1 x rear)	
Switches		
Selected	3 x Pushbutton	5 x Pushbutton
Station Selection	1 x Slide Switch	
LEDs		
KVM	3 (Orange)	5 (Orange)
Audio	3 (Green)	5 (Green)
USB Link	3 (Green)	5 (Green)
Emulation		
Keyboard / Mouse	USB	
Video	Up to 7680 x 4320@60 Hz, 5120 x 2880@60Hz, 4096 x 2160@120Hz	
Scan Interval	1-99 seconds (default: 5 seconds)	
Power Consumption	DC12V:2.26W	DC12V:3.18W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0-80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.47 kg	0.62 kg
Dimensions (L x W x H)	20.00 x7.18 x 4.30 cm	26.00 x 7.18 x 4.30 cm

### ATEN International Co., Ltd.

3 F., No. 125, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 12/2025 V1.0

© Copyright 2025 ATEN® International Co. Ltd.  
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.

