

Basic PDU

PE0112 Series

The PE0112 series Basic PDU contains 12 AC outlets and is available in IEC or NEMA socket configurations. The PE0112 series Basic PDU features a space-saving 1U design that allows it to be mounted vertically on the outside of a rack, resulting in a more efficient use of space in the server room, while providing 12 AC outlets.

PE0112A Front View



PE0112G Front View




Features

Basic PDU

- Space saving — 1U rack mount design
- IEC or NEMA outlet models
- Overcurrent Protection
- Aluminum material

Typical Applications

- Servers
- Network Devices
- Telecom Equipment

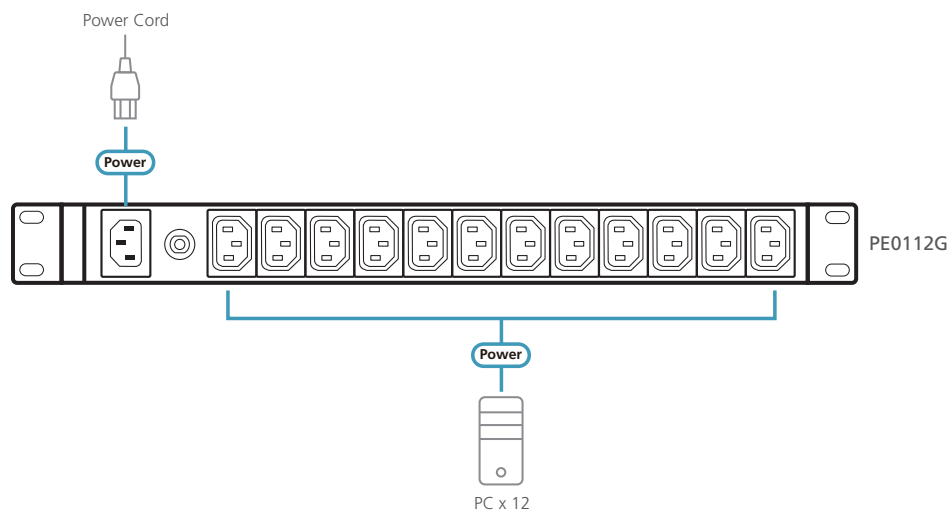

Specifications

	PE0112A	PE0112G
Electrical		
Nominal Input Voltage	100-120 VAC	100-240 VAC
Maximum Input Current	15A (Max) (UL de-rated 12A Max) (PSE 10A)	10A (Max)
Input Frequency	50 – 60 Hz	
Input Connection	NEMA 5-15P	IEC60320 C14
Input Power	1800VA (MAX) ; 1440VA (UL de-rated)	2400 VA (Max)
Outlet Type	(12) NEMA 5-15R	(12) IEC 60320 C13
Nominal Output Voltage	120 VAC	240V
Maximum Output Current (Outlet)	15A (Max) (UL de-rated 12A Max) (PSE 10A)	10A (Max)
Maximum Output Current (Bank)	15A (Max) (UL de-rated 12A Max) (PSE 10A)	10A (Max)
Maximum Output Current (Total)	15A (Max) (UL de-rated 12A Max) (PSE 10A)	10A (Max)
OPD(Overcurrent Protection Device)	Yes	
Physical Properties		
Dimensions (L x W x H)	48.20 x 4.44 x 4.50 cm	48.20 x 4.44 x 4.50 cm
Weight	0.65 kg	0.65 kg
Power Cord Length	10 ft (14#)	10 ft (3×1.0mm²)
Environmental		
Temperature (Operating / Storage)	0 – 40 °C / -20 – 60 °C *When the environmental temperature comes close 40 degrees, it is recommended to lower the load to 60% to comply to the safety regulations.	
Elevation (Operating / Storage)	3000 m	
Compliance		
EMC Verification	FCC Class A	CE Class A
Safety Verification	UL	CE, LVD, UL

