




65W 3-Port GaN Charger

UP365

Pocket-Sized.
Power-Ready.



Meet the ultimate charging companion to keep your devices fueled and organized. The ATEN UP365 delivers up to 65W across all ports, allowing you to fuel up to three devices simultaneously. Advanced GaN technology ensures efficient charging and excellent heat management, while the CoreShield™ system provides multiple layers of protection for safe and stable performance. The compact enclosure with a foldable plug makes it easy to carry wherever you go.



GaN Chip



PD 3.0



CoreShield™

Features

Delivery of Up to 65W Across Three Ports

Contains an USB Type-A connector and two USB-C connectors to enable charging of up to three devices simultaneously at the highest possible speed with 65W of total power, and meanwhile, keeping your desktop organized and clean.

Powered by GaN Technology

Engineered with GaN technology to significantly reduce heat loss without compromising charging speed or safety in a compact form factor.

CoreShield™ Protection Integrated

Integrated with ATEN CoreShield™ system, the charger features multi-layer defense against overvoltage, short-circuit, over temperature, overcurrent, surge, static, and EMI. Meanwhile, the charger is built with fire-resistant materials to minimize fire risks.

Foldable and Portable Construction


With the charging brick so compact and the plug foldable, the charger boasts a travel-friendly design to easily slide into your pocket. The foldable plug avoids scratching your tech gear screens and other belongings.

Firm Connection with Sliding Lock*

Firmly secures the charging by preventing accidental separation between the plug and the outlet.

Note: Only applicable to EU and KR versions.

Installation

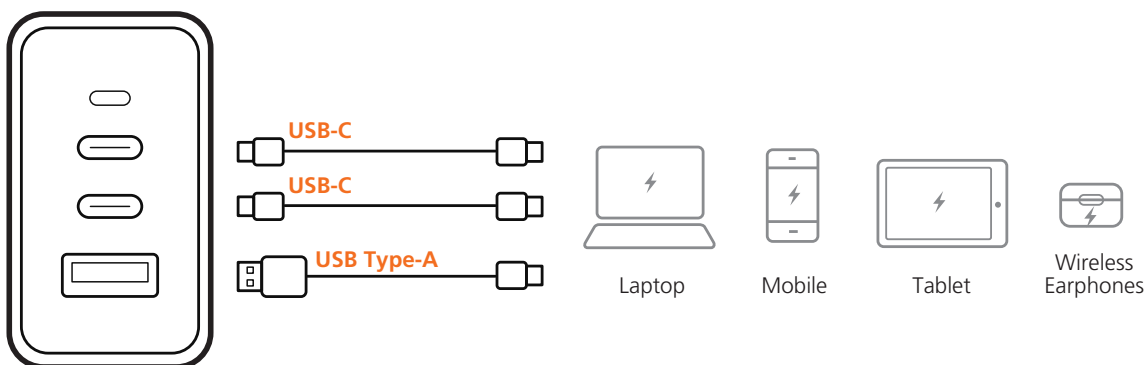

Specification

Power Plug			
Model	UP365-US	UP365-EU	UP365-KR
Plug Type	US Plug - Foldable	EU Plug - Foldable	KR Plug - Foldable
Dimensions (W × D × H)	30 x 55.2 x 53mm	30 x 64.6 x 53mm	30 x 64.6 x 53mm
Weight	118g	123g	123g
Input			
Input Voltage Range	100Vac - 240Vac		
Input Frequency Range	50Hz / 60Hz		
Rated Input current	1.5A max.		
Output			
Watts	USB-C1: 65W max. (5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A) USB-C2: 65W max. (5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A) USB-A: 30W max. (5V=3A, 9V=3A, 12V=2.5A, 20V=1.5A) USB-C1+C2: 45W+20W max. USB-C1+A: 45W+18W max. USB-C2+A: 24W max. (5V=4.8A) Total outputs: 65W max.		
Physical Properties			
Output Type	2x USB-C 1x USB Type-A		
Power Indicator	1x LED light		
Environmental			
Operating Temperature	0 – 35°C		
Operating Humidity	5 – 90 % RH, Non-Condensing		

Package Contents

1x UP365 65W 3-Port GaN Charger

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District,
 New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 | Fax: 886-2-8692-6767
 www.aten.com | E-mail: marketing@aten.com

Released: 06/2026 V1.0

© Copyright 2026 ATEN® International Co. Ltd. ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners. Product information is subject to change without prior notice.