



2 x 2 USB 3.2 Gen 1 Sharing Switch

US4322

**Style Meets Efficiency –
One-Touch USB Sharing**




The US4322 enables sharing of up to two USB Type-A peripherals at a blazing-fast data transfer rate reaching 5 Gbps between two PCs at a press of the built-in pushbutton thanks to InstaSync™ technology it adopts for fast switching. It comes plug-and-play to support mainstream operating systems, including Windows, macOS, and Linux, without any driver or software installation. The compact casing with accent light enhances aesthetic appeal, matching the vibes of your hybrid workstation or gaming corner.



One Button
Switch



USB 3.2 Gen 1



Compact
Design



Accent
Light

Features

InstaSync™ Technology

Fast USB switching capability that keeps the flow smooth and uninterrupted

Two USB Device Sharing Across Two Computers

Farewell to the need of swapping cables and peripherals between two separate computers

5 Gbps Data Transfer with USB 3.2 Gen 1

Up to 5 Gbps SuperSpeed data transfer rates, which is about 10 times faster than the USB 2.0 standard, allow users to transfer large files quickly and efficiently

Quick Switch via Built-In Pushbutton

Enjoy the hassle-free experience of switching USB peripherals between two systems with just one single button press

Compact Enclosure with Accent Lighting

Aesthetically pleasing with its accent lighting and a casing so compact that it occupies very little space


Hot Pluggable

Allows adding / removal of the peripherals/computers connected to the installation without having to power down the switch. Besides, no drivers or software is required.

OS Independent

Compatible with mainstream operating systems including Windows, macOS, and Linux


Installation

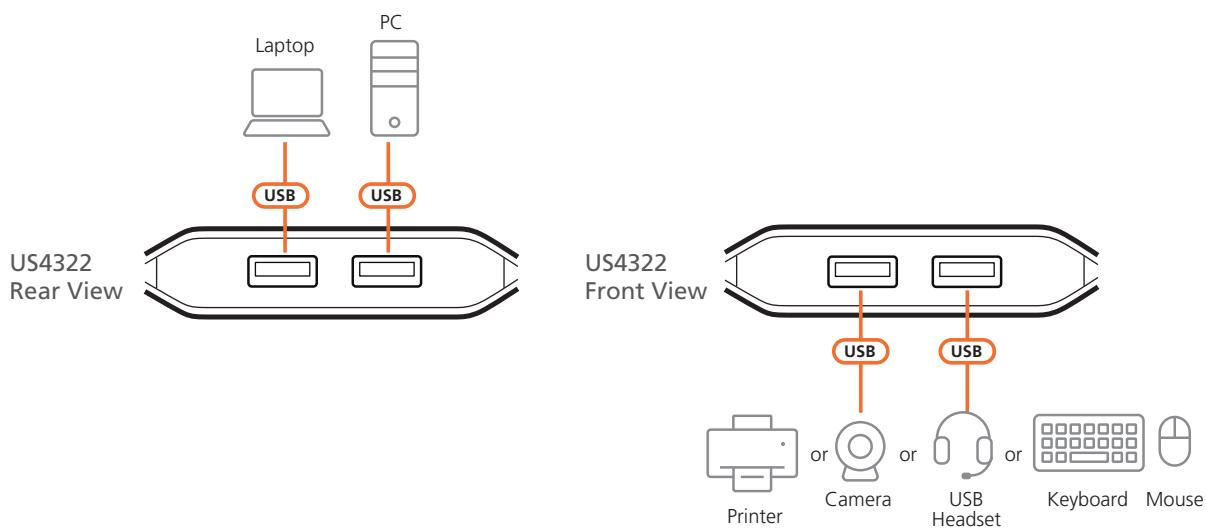

Specification

Computer Connections	2
Port Selection	Pushbutton
Connectors	
Computer	2 x USB Type-A Female (Blue)
Device	2 x USB Type-A Female (Blue)
Cable Length	
USB Cable	2 x USB 3.2 Gen 1 Type-A to Type-A Cable (1.5 m)
LEDs	
Selected	2 (Orange)
Power	2 (Orange, Bottom Side)
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	10 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	34 g
Dimensions (L x W x H)	6.1 x 5.65 x 1.52 cm
Carton Lot	20 pcs

Package Contents

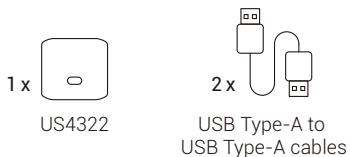

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datung Rd., Sijhih District,
New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 | Fax: 886-2-8692-6767
www.aten.com | E-mail: marketing@aten.com

Released: 12/2025 V1.0

© Copyright 2025 ATEN® International Co. Ltd. ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners. Product information is subject to change without prior notice.