

PresentON® Wireless Dongle for Conferences

VP201

The VP201 works in conjunction with the VP2020 / VP2021 4K Wireless Presentation Switch to take BYOD & BYOM to the next level. With just one quick click, users can share screen content from their own USB-C laptops wirelessly, eliminating restrictive cables. USB touchback assures presenters efficient remote control over their PCs from the touchscreen / interactive whiteboard in the room without having to go back and forth. Plus, due to the VP201's universal, cross-platform compatibility, participants can interact directly with content from their USB conference devices, such as microphones, cameras, and speakers, and host meetings on all major operating systems using their preferred video conferencing tools like Microsoft Teams and Zoom. The VP201 does not just transform traditional meeting spaces into hybrid conference rooms, but also fosters collaboration among the organization and the remote team members.




Features

- Wireless A/V content casting and power supply via a single USB-C port with just one click
- USB touchback — enables PC control via the in-room eWhiteboard or content interaction from users' USB devices
- Bring Your Own Device (BYOD) — share content from users' USB-C laptops / mobile devices wirelessly
- Bring Your Own Meeting (BYOM) —
 - Host / Join a video conference using your preferred tool directly from your laptop
 - Supports video conferencing tools like Microsoft Teams, Google Meet, and Zoom
 - Supports in-room AV equipment ranging from cameras, microphones to speakers
- OS-independent — work on Windows / macOS / Linux
- Point-to-point wireless transmission via native mirroring when connecting to VP2020 / VP2021
- Plug-and-play with no need to install software / drivers



Content Sharing and BYOM Video Conferencing

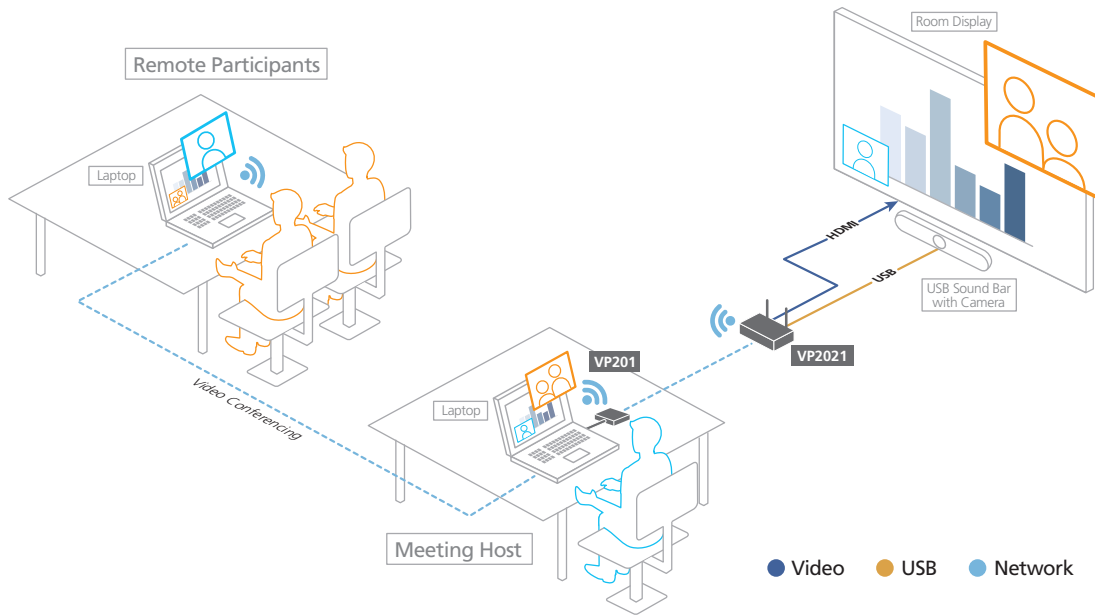

Specifications

	VP201
Video Input	
Interfaces	1 x USB-C
Video	
Max. Data Rate	Average ~ 12 Mbps
Max. Resolution	Up to 1080p @ 60 Hz
Wireless	
Authentication Protocol	WPA2-PSK in stand alone mode WPA2-PSK using the ATEN PresentOn solution in network integration mode
Wireless Transmission Protocol	IEEE 802.11 a/g/n/ac
Frequency Band	Switchable dual band 2.4 GHz and 5 GHz (DFS channels not supported)
Reach	Up to 10 m (33 ft) line of sight from Dongle to Station
Connectors	
Console Ports	1 x USB-C male
Power	1 x USB-C male
Pushbuttons	
Operating Mode Selection	1 x Video Sharing ON/OFF 1 x USB Conference ON/OFF
LEDs	
LED Indicator	1 x Video Sharing status LED 1 x Conference Status LED
Power Consumption	DC 5V:1.37W
Environmental	
Operating Temperature	0 – 40 °C
Storage Temperature	-10 – 70 °C
Humidity	20 – 80% RH, Non-Condensing for Operation
Physical Properties	
Housing	Plastic
Weight	183 g
Dimensions (L x W x H)	6.7 x 6.9 x 1.5 cm

ATEN International Co., Ltd.

3 F., No. 125, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221424, Taiwan (R.O.C.)
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 04/2026 V1.0

© Copyright 2026 ATEN® International Co. Ltd.
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.

