



4-Port True 4K HDMI Switch

VS4841

Level Up 4-Stream Switching in True 4K – Push, Enjoy Instantly



The VS4841 enables ultra-fast switching among four HDMI sources on a single display with a simple press of the on-device pushbutton or IR remote. Powered by RapidSync™ technology, it ensures instant synchronization and provides smooth, stable True 4K visuals without signal delay. Supporting HDR10+, Deep Color, 3D formats, and various premium audio formats, it ensures a fluid, immersive AV experience with stunning clarity and cinematic sound. Its sleek, compact, and user-friendly design makes it a perfect solution for home entertainment, professional AV setups, and efficient source management.



Accent Light



Compact Design



18Gbps Max. Bandwidth



Auto Switching

Features

RapidSync™ High-Speed AV Switching

Ensures instant synchronization and ultra-fast transitions, eliminating signal delay

HDMI 3D/Deep Color, HDR10+, HDCP 2.2 Compatible

Guarantees stable performance, broad compatibility, and superior image quality

Flexible True 4K Switching Control

Manages four HDMI sources on a single True 4K display, with easy switching via pushbutton or IR remote

Master-Class Audio Immersion

Full support for LPCM 7.1, Dolby® & DTS-HD Master Audio™ delivers theatrical-quality surround sound


Auto Plug-in Detection

Enables instant port switching and smooth signal transfer upon connection, ensuring zero downtime

Aesthetic Compact Form

Slim profile and stylish accent lighting allow integration into any space, perfectly complementing your setting

Installation

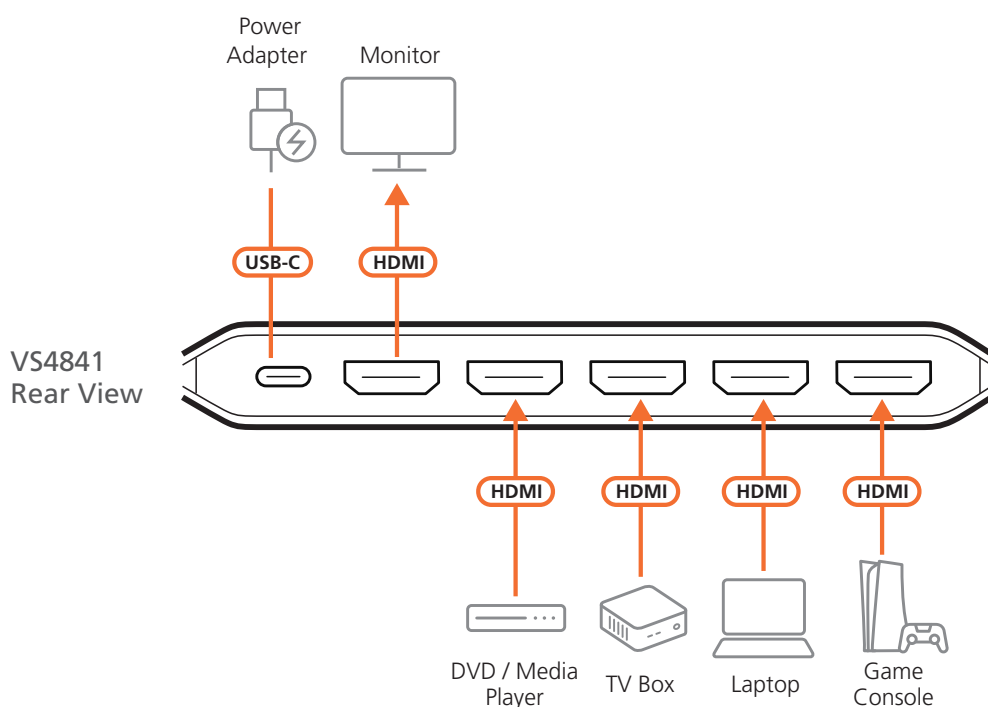


Specifications

| Video Input | |
|------------------------|--|
| Interfaces | 4 x HDMI Type-A Female (Black) |
| Impedance | 100 Ω |
| Max. Distance | 3 m at 3840 x 2160 @ 60Hz (4:4:4) |
| Video Output | |
| Interfaces | 1 x HDMI Type-A Female (Black) |
| Impedance | 100 Ω |
| Max. Distance | 3 m at 3840 x 2160 @ 60Hz (4:4:4) |
| Video | |
| Max. Data Rate | 18 Gbps (6 Gbps per lane) |
| Max. Pixel Clock | 600 MHz |
| Compliance | HDMI (3D, Deep Color, 4K); HDCP 2.2 Compatible |
| Max. Resolution | 3840 x 2160 @ 60Hz (4:4:4) |
| Audio | |
| Input | 4 x HDMI Type-A Female (Black) |
| Output | 1 x HDMI Type-A Female (Black) |
| Control | |
| IR | 1 x IR Receiver |
| Connectors | |
| Power | 1 x USB-C (5V/1A) |
| Cable Length | |
| USB Cable | 1 x USB Type-C to Type-A (1 m) |
| LEDs | |
| Selected | 4 x Port Selector (Orange) |
| Power | 2 (Orange, Bottom Side) |
| Environmental | |
| Operating Temperature | 0 – 40 °C |
| Storage Temperature | -20 – 60 °C |
| Humidity | 0 – 80% RH, Non-Condensing |
| Physical Properties | |
| Housing | Plastic |
| Weight | 0.07 kg |
| Dimensions (L x W x H) | 14.50 x 5.65 x 1.52 cm |
| Carton Lot | |
| | 20 pcs |


Package Contents



1 x VS4841



1 x IR remote controller



1 x USB power cable (Type-C to Type-A)

ATEN International Co., Ltd.
3F., No.125, Sec. 2, Datung Rd., Sijhih District.,
New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 | Fax: 886-2-8692-6767
www.aten.com | E-mail: marketing@aten.com

Released: 12/2025 V1.0
© Copyright 2025 ATEN® International Co. Ltd. ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners.
Product information is subject to change without prior notice.
The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

