


master view™_{max}

Slideaway Console



Diagram

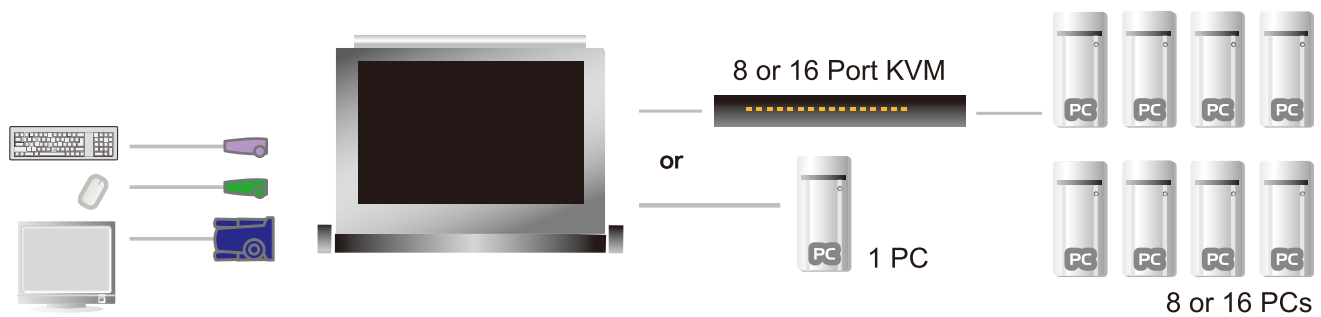

Model: CL1200

Features

- Integrated KVM console featuring a 15" or 17" LCD monitor in Slideaway housing
- Dual consoles- simultaneous viewing and control or select one or the other via Hotkey
- Compatible with ATEN KVM Switches and servers
- Internal power built in
- Less than 1 U high mountable rack
- Adjustable depth to fit within the rack
- Improved design-Single person installation (Optional)

Rack Mounting Kit	Depth
Long (Optional)	68cm - 100cm
Short (Standard)	42cm - 72cm

Easy Installation Rack Mounting Kit	Depth
Long (Optional)	68cm - 105cm
Short (Optional)	42cm - 70cm

Specifications

Function		CL 1200	
Connectors	Second Console Keyboard	1 x 6-pin Mini-DIN Female (Purple)	
	Video	1 x HDB-15 Female (Blue)	
	Ports Mouse	1 X 6-pin Mini-DIN Female (Green)	
	KVM Ports Keyboard/Video/ Mouse	1 x SPHD-15 Female (Yellow)	
Switches	Power	1 x 3-prong AC Socket	
	LCM Adjustment	4 x Pushbutton	
	KM Reset	1 x Semi-recessed Pushbutton	
LEDs	Power	1 x Rocker	
	Power	1 (Blue)	
	Num Lock	1 (Green)	
	Caps Lock	1 (Green)	
Emulation	Scroll Lock	1 (Green)	
	Keyboard/ Mouse	PS/2	
	Video	15" LCD 1024 x 768; DDC2B	
I/P Rating	17" LCD	1280 x 1024; DDC2B	
	Power	100-240V AC; 50/60 Hz; 1A	
	Consumption	120V, 19W/230V, 22W	
Environment	17" LCD	120V, 21W/230V, 24W	
	Operating Temp.	0-40°C	
	Storage Temp.	-20-60°C	
	Humidity	0-80% RH, Non-condensing	
Physical Properties	Housing	Metal	
	Weight	15" LCD	13.20 kg
		17" LCD	13.70 kg
	Dimensions(D x W x H)		52.00 x 48.00 x 4.20 cm