


master view™ max

Slideaway LCD KVM Switch



Diagram

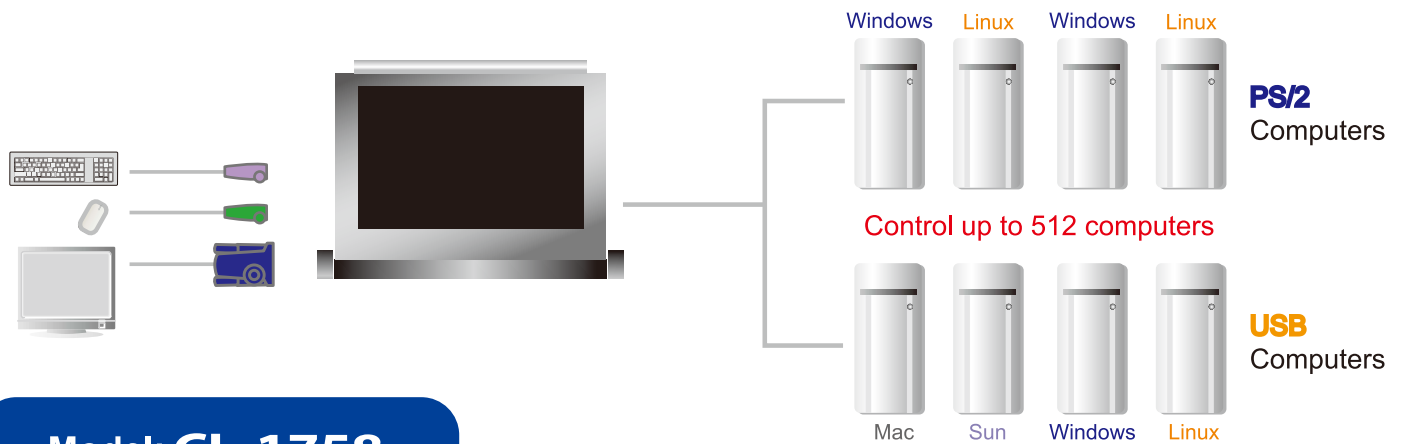

Model: CL-1758

Features

- Integrated KVM console with 15" or 17" LCD monitor - in a 1U high Slideaway housing for convenient rack mounting.
- Space saving technology - two consoles (one bus) controls 8 computers.
- Cascadable to three levels for control of up to 512 computers from a single console.
- Dual interface support - PS/2 or USB keyboard and mouse data transfer from the switch to the computer
- Multiplatform support: Windows, Mac, Linux, and Sun host systems
- No software required - convenient computer selection via mouse driven intuitive On Screen Display (OSD) menus and Hotkeys.
- Auto Scan feature for monitoring user-selected computers.
- Hot Pluggable - add or remove computers without having to power down the switch.
- Two level password security - only authorized users view and control the computers - up to four users plus an administrator with separate profiles for each.
- DDC Emulation of the LCD Monitor - VGA settings of every connected computer are automatically adjusted for optimal output to the LCD Monitor.
- Upgradable firmware.
- Supports Windows 98 SE or higher, Mac OS 8.6 or higher, Linux Red Hat 7.1 or higher, and SUN Solaris
- * For PC compatible computers only. Mac and Sun computers must use the USB cable connection.

Rack Mounting Kit	Depth
Long (Optional)	68cm - 110cm
Short (Standard)	42cm - 82cm

Easy Installation Rack Mounting Kit	Depth
Long (Optional)	68cm - 105cm
Short (Optional)	52cm - 70cm

Specifications

Function		CL1758
Computer Connections	Direct	8
	Max.	512 (via Cascade CS1758*)
Port Selection		OSD, Hotkey, Pushbutton
Connectors	Second Console Ports	Keyboard Video Mouse
	KVM Ports	Keyboard/Video/Mouse
	Power	1 x 3-prong AC Socket
	F/W Upgrade	1 x RJ-11 Female (Black)
	F/W Upgrade	1 x Slide
Switches	Port	8 x Pushbutton
	Power	1 x Rocker
	On Line	8 (Orange)
LEDs	Selected	8 (Green)
	Power	1 (Blue)
	Num Lock	1 (Green)
	Caps Lock	1 (Green)
	Scroll Lock	1 (Green)
Video	15" LCD	1024 x 768; DDC2B
	17" LCD	1280 x 1024; DDC2B
Scan Interval (OSD Select)		1-255 Seconds
I/P Rating		100-240V AC; 50/60 Hz; 1A
Power Consumption	15" LCD	120V, 20W/230V, 22W
	17" LCD	120V, 23W/230V, 26W
	Operating Temp.	0-40°C
Environment	Storage Temp.	-20-60°C
	Humidity	0-80% RH, Non-condensing
	Housing	Metal
Physical Properties	Weight	15" LCD 14.50 kg 17" LCD 15.00 kg
	Dimensions (D x W x H)	62.60 x 48.00 x 4.20cm