



Friendly Graphical User Interface



LEDs for Status Monitoring



Wireless Remote Access (WiFi)




Local PS/2 Console Support



Custom Connector for KVM or Computer Connecting

Shared Access 1 Local User 1 Remote IP User	Local Console PS/2	Computers SPHD PS/2	OS Support Win, Linux, Unix, FreeBSD	Wireless
Remote UI Browser, Java Client				

Diagram

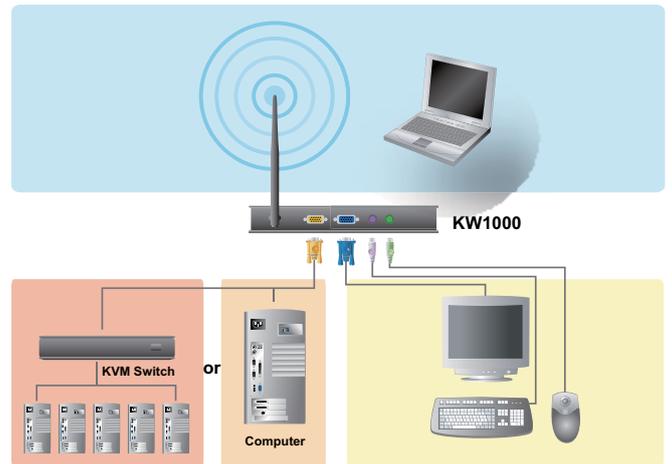

Specifications

Function		KW1000	
Connectors	KVM Ports	1 x SPHD-15 Female (Yellow)	
	Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x 6-pin Mini-DIN Female (Green)
	Power	1 x DC Jack	
Switches	KW1000 Reset	1 x Semi-recessed Pushbutton	
	Wireless Reset	1 x Semi-recessed Pushbutton	
LEDs	Power	1 (Blue)	
	RX/TX	1 (Green/Orange)	
	Link	1 (Green)	
	WLAN	1 (Orange)	
Video		1600 x 1200 @ 60 Hz	
Power Consumption		1800mA	
Environment	Operating Temp.	0-40°C	
	Storage Temp.	0-60°C	
	Humidity	0-80% RH, Non-condensing	
Physical Properties	Housing	Metal	
	Weight	1.13kg	
	Dimensions (L x W x H)	26.60x 11.30 x 3.40 cm	

* The specifications and pictures are subject to change without notice.