

## **HDMI to 3G/HD/SD-SDI Converter** VC840

The VC840 HDMI to 3G/HD/SD SDI Converter provides a professional way to exchange high definition signals in real time. The SDI and HDMI signal conversion is 100% digital and guarantees no loss of quality for both the audio and video transmission. The VC840 provides 2 low jitter SDI outputs for dual display. The VC840 is the most dependable way to convert signals with confidence when monitoring in any post or broadcast application.









- Converts an HDMI input signal to 3G/HD/SD-SDI formats in real time while avoiding transformation loss for both audio and video signals
- Supports additional analog stereo audio and coaxial digital audio
- HDMI (Deep Color)
- LED indication of power and signal status
- Supports an SDI distance of up to 90M (3G-SDI), 150M (HD-SDI) or 300M (SD-SDI) of RG6
- Supported SDI formats:
  - SD-SDI (SMPTE 259M, up to 270Mbps)
  - HD-SDI (SMPTE 292M, 296M, up to 1.485Gbps)
  - 3G-SDI (SMPTE 424M, 425M level A, up to 2.97Gbps)
- Video Support:


525i@59.96, 625i@50

720p@50/59.94/60

1080i@50/59.94/60

1080p@23.97/24/25/29.97/30/50/59.94/60

- Supports 8 audio channels @ 48kHz rate
- Offers 2 low-jitter SDI outputs for dual display
- Features automatic detection of 3G/HD/SD-SDI signals
- Reclocking SDI signals for cascading and thus longer transmission
- Locking power connector for secure communications
- Selectable EDID settings and EDID learning mode

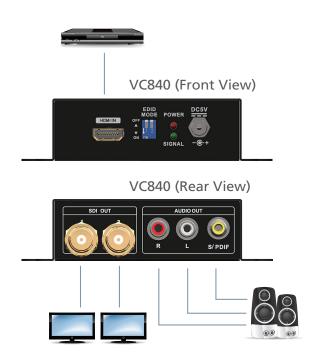

## **Specifications**

Function				VC840
Connectors	Input	HDMI In		1 x HDMI Type A Female (Black)
	Output	SDI Out		2 x BNC (Gold)
		Audio	Analog	2 x RCA (Red/White)
			Digital	1 x RCA (Yellow)
	Power			1 x DC Jack
Switches	EDID Mode			2 x Dip Switch
LEDs	Power			1 (Red)
	Signal			1 (Green)
Power Consumption				DC5V, 3.5W
Environment	Operating Temp.			0-40°C
	Storage Temp.			-20~60°C
	Humidity			20~90% RH, Non-condensing
Physical Properties	Housing			Metal
	Weight			0.29 kg
	Dimensions(L x W x H)			12.22 x 10.70 x 3.04 cm

Product information is subject to change without prior notice.

Publish Date: 01/2020 V1.0



3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com

