

VE172R

AV Over Cat 5 Receiver with Cascade


- VE172R AV Over Cat 5 Receiver is compatible with ATEN MDS Standard Plus Solution (VS1204T/VS1208T, VE170T/VE170R/VE170RQ). It can cascade up to 10 levels make long distance transmissions up to 150m.

Compatible Transmitter Units:

VE170T AV Over Cat 5 Transmitter,
 VS1204T AV Over Cat 5 Transmitter,
 VS1208T AV Over Cat 5 Transmitter


Compatible Receiver Units:

VE172R AV Over Cat 5 Receiver with Cascade
 VE170R AV Over Cat 5 Receiver
 VE170RQ AV Over Cat 5 Receiver with Deskew



Features

- Uses Cat 5e cable to connect the transmitter and receiver units
- **Cascadable up to 10 levels**
- Long distance transmission up to 150m
- Superior video quality – 1920x1200 @ 60Hz (30 m); 1600x1200 @ 60Hz (100 m); 1280x1024 @ 60Hz (150 m)
- Audio enabled (mono)
- Adjustable gain/compensation control – manually adjusts signal strength to compensate for distance
- Built-in 8KV/15KV ESD protection
- Rack-mountable
- Complies with VESA FDMI mount standard

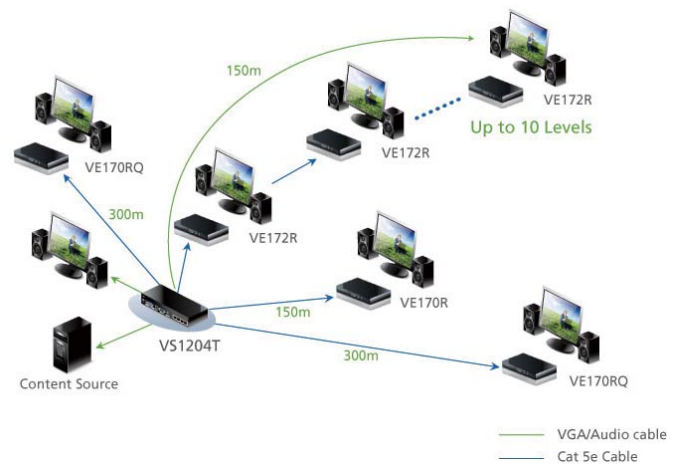

Specification

Function		VE172R
Connectors	Video Out	1 x HDB-15 Female (Blue)
	Audio Out	1 x Mini Stereo Jack Female (Green)
	Line Input	1 x RJ-45 Female
	Line Output	1 x RJ-45 Female
	Power	1 x DC Jack
LEDs	Power	1 (Green)
Switch	Manual Gain/Compensations Control	2 x Knob
Video		1920 x 1200 @60Hz (30m), 1600 x 1200 @60Hz (100m), 1280 x 1024 @60Hz (150m)
Power Consumption		DC5.3V, 2.3W
Environment	Operating Temp.	0-50°C
	Storage Temp.	-20-60°C
	Humidity	0-80% RH, Non-condensing
Physical Properties	Housing	Metal
	Weight	242g
	Dimensions (L x W x H)	12.77 x 9.04 x 2.26 cm

