

VS0404



- 4-Port Video Matrix Switch (4 inputs 4 outputs)
- ➔ The VS0404 Video Matrix Switch allows video and audio from 4 computers to be routed to 4 monitors, projectors and speakers. Ideal for presentations and applications where information from multiple computers is being delivered to multiple destinations.



Features


- Each of the 4 video outs can toggle between Source 1 and Source 4 using front panel pushbuttons.
- Audio enabled.
- Duplicate and enhance video signals to up to 65 m (max.).
- Expandable: Cascade to ATEN's video splitters to support hundreds of video displays.
- With up to 300 MHz Video Bandwidth.
- OS Support: Windows 2000, Windows XP, Linux, Mac and Sun

Specification

Display Connections			4
Computer Connections			4
Port Selection			Pushbutton
Connectors	Input	Vdieo	4 x HDB-15 Male (Blue)
		Audio	4 x Mini Stereo Jack Female (Green)
	Output	Vdieo	4 x HDB-15 Female (Blue)

		Audio	4 x Mini Stereo Jack Female (Green)
		Power	1 x DC Jack (Black)
Switches		Power	4 x Pushbutton
LEDs		Power	1 (Blue)
		Activity / Source	4 (Green)
	Input	1	4 (Green)
		2	4 (Green)
		3	4 (Green)
4		4 (Green)	
Video			1920 x 1440 @ 60Hz
Video Bandwidth			300 MHz
Sync Range			Sync Positive/Negative
Signal Range			65m (210')
Power Consumption			DC 5.3V ,7.16W (Max.)
Environment	Operating Temp.		0-50°C
	Storage Temp.		-20-60°C
	Humidity		0-80% RH, Non-condensing
Physical Properties	Housing		Metal
	Weight		0.89kg
	Dimensions (L x W x H)		26.00 x 7.50 x 4.50 cm

Diagram

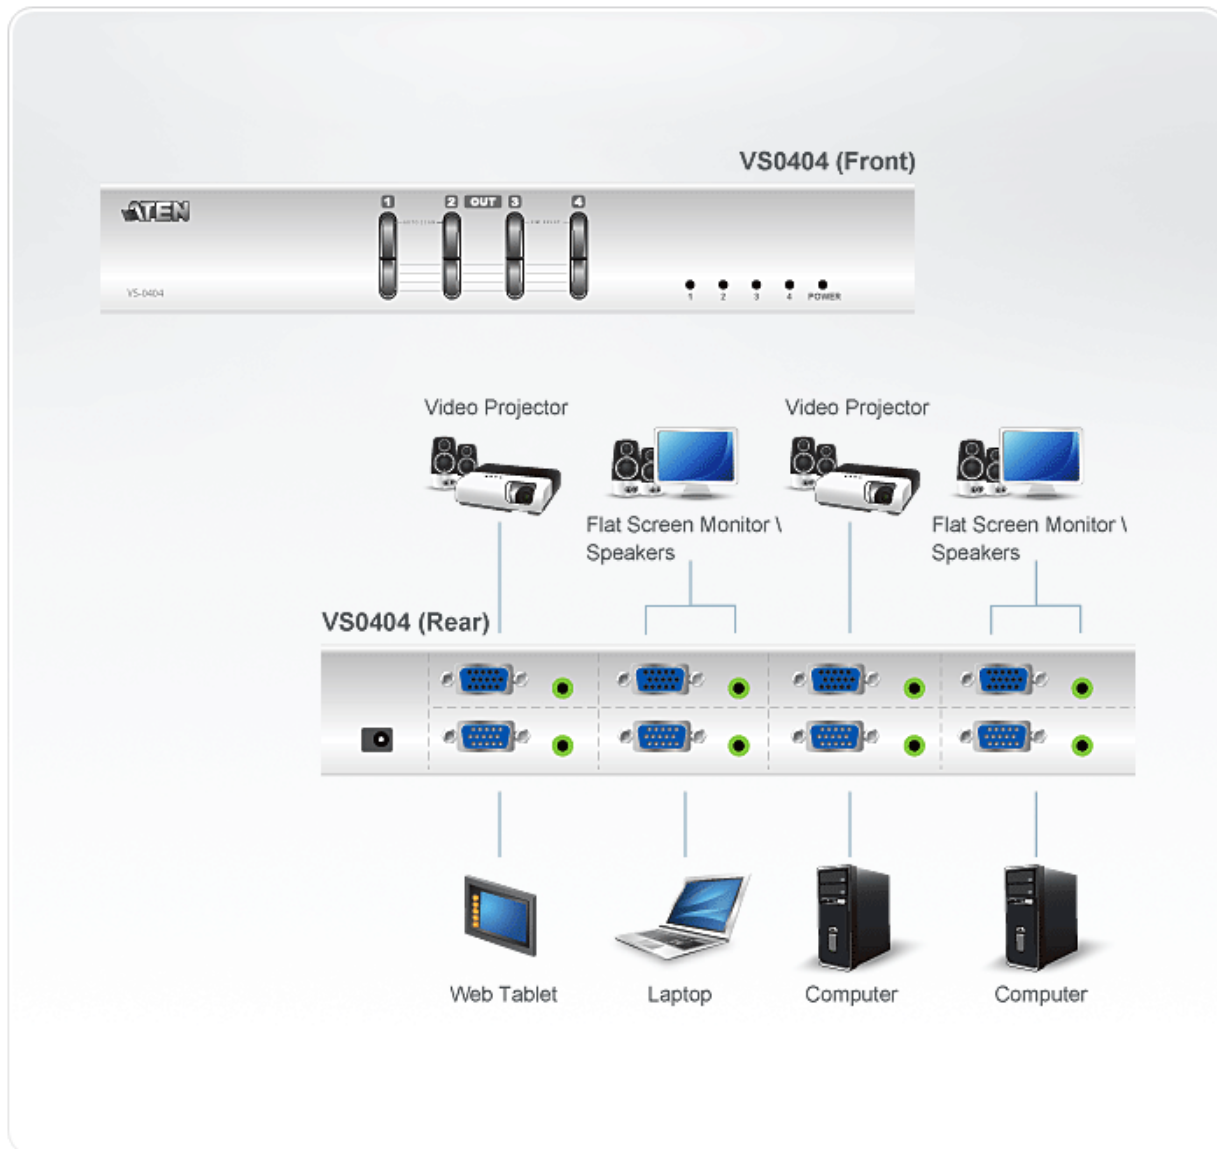

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2012 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.