


## A flexible and future-proof presentation environment

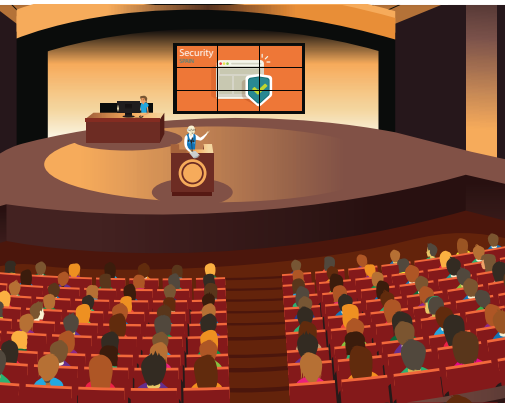

### Governmental institution in Spain


A new conference room enhances the organisation of international conferences at the headquarters of the institution. To fit all presentation requirements, a flexible and easy-to-use media distribution solution was sought for by the system integrator.

ATEN's modular matrix switch turns out to be a perfect match. With its large amount of in- and output ports, ability to use multiple interfaces and Seamless switching technology, the VM1600 modular matrix switch is not only flexible but also a future proof solution.

### Requirements

- Ability to connect multiple HDMI sources, leaving the option open to install other interfaces
- Flexible enough to distribute either a single or multiple keynote presentations at once
- Clean and easy-to-use setup equipped with a wireless control system
- Effective price-quality balance offering a future proof infrastructure

### Solution

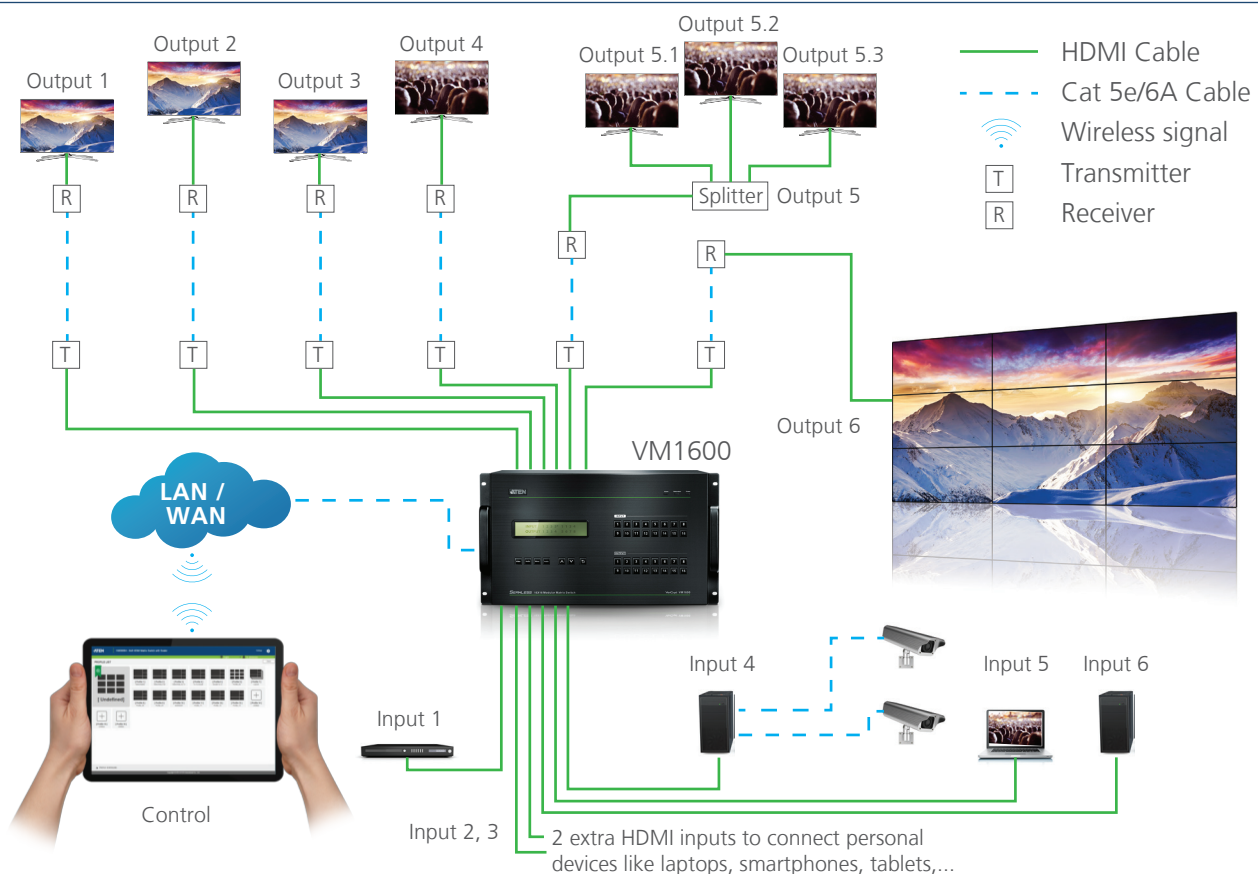

## Products

### *VM1600 – Modular matrix switch*

- Dual power supply
- Video wall function
- Scale to diverse resolutions
- Up to 32 connection profiles
- Install up to 4 in- and 4 output boards
- Connect up to 16 sources and 16 displays
- Mobile control via award winning WebGUI
- Seamless Switching technology: < 0,1 seconds
- Compatible with various interfaces: HDMI, DVI-D, HDBaseT, VGA and SDI



reddot award 2015  
winner interface design



### *VM7804 – HDMI input board*

- 4 HDMI input ports
- Up to 1080p



### *VM8804 – HDMI output board*

- 4 HDMI output ports
- Up to 1080p



## Benefits

- *User interface* – Swift profile control and setup with the Red Dot Award winning user interface.
- *Modular* – VM1600 is compatible with many commonly used interfaces, which makes the setup future proof and easy to change or expand whenever needed.
- *Seamless Switching* – No delay in switching content while presenting.

*“ The system is easy to control, while the modular design allows any visitor to just hook up his/her personal device. ”*

- System integrator

Note: this case study has been rendered anonymous due to data protection reasons.