


Secure KVM Desktop Access to Computers at Multiple Classification Levels

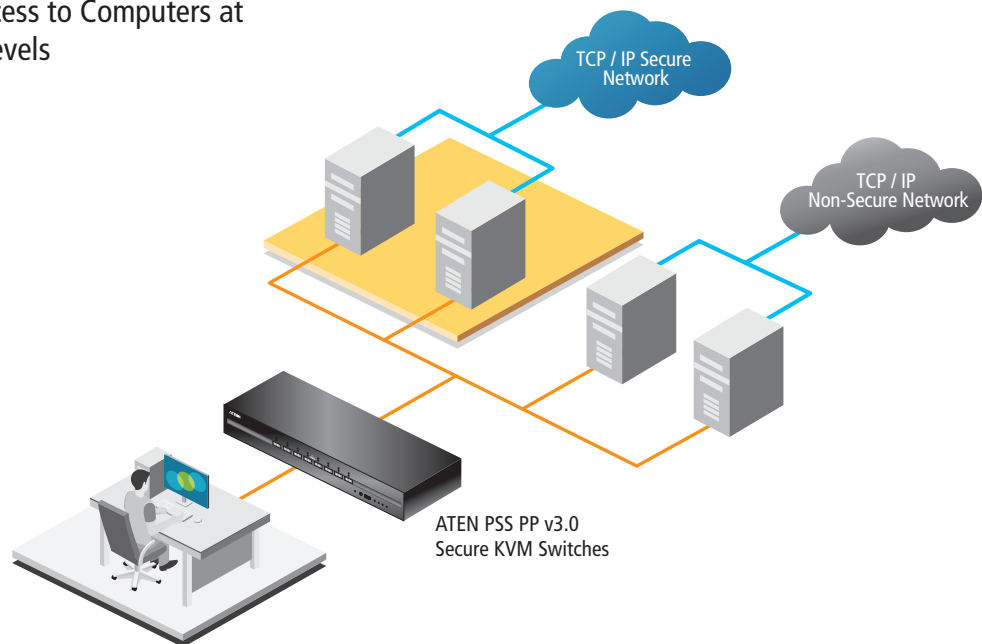

PC Video Connection	DisplayPort						HDMI					
Console Video Connection	HDMI						HDMI					
Ports	2	4	8	2	4	8	2	4	8	2	4	8
Available Model	CS1182DP	CS1184DP	CS1188DP	CS1142DP	CS1144DP	CS1148DP	CS1182H	CS1184H	CS1188H	CS1142H	CS1144H	CS1148H
Number of Displays	Single Display			Dual Display			Single Display			Dual Display		
Resolution	Max. 3840 x 2160 @ 30Hz (UHD)						Max. 3840 x 2160 @ 30Hz (UHD) 1920 x 1080 (FHD)					
Console Keyboard/ Mouse	PS2/USB						PS2/USB					
CAC Port	Yes						Yes					
Audio	Analog speaker only						Analog speaker only					

PC Video Connection	DVI					
Console Video Connection	DVI					
Ports	2	4	8	2	4	8
Available Model	CS1182D	CS1184D	CS1188D	CS1142D	CS1144D	CS1148D
Number of Displays	Single Display			Dual Display		
Resolution	3840 x 2160 @ 30Hz* Dual Link: 2560 x 1600 Single Link: 1920 x 1200 DVI-A: 2048 x1536					
Console Keyboard/ Mouse	PS2/USB					
CAC Port	Yes					
Audio	Analog speaker only					

* DVI Secure KVM switches offer 3840 x 2160 @ 30Hz video output on compatible HDMI-interfaced monitors/computers with ATEN DVI-to-HDMI KVM cables