

© Copyright 2019 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd. All rights reserved.
All other trademarks are the property of their respective owners.


Printing Date: 07/2019




Package Contents

- 1 CC2000 USB License Key
- 1 Software CD
- 1 User Instructions

Server Installation Diagram

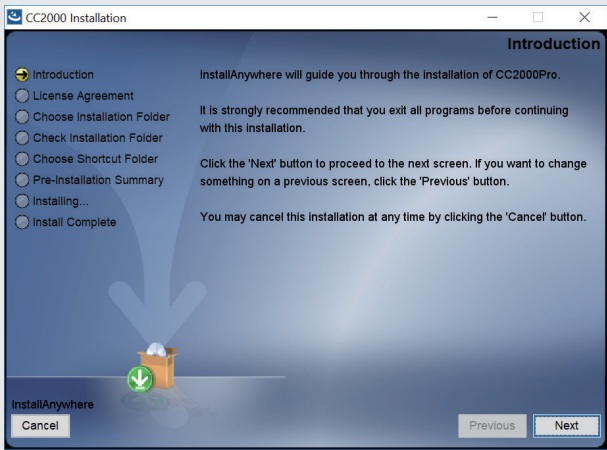

Login Page

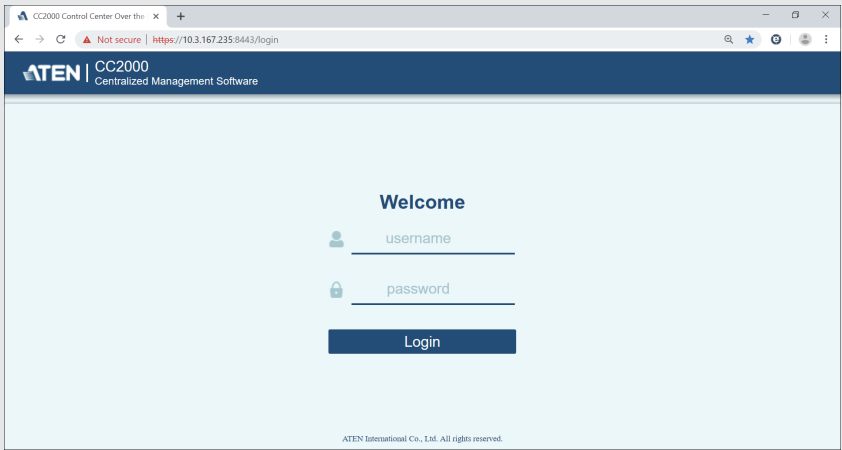

Support and Documentation Notice

All information, documentation, firmware, software utilities, and specifications contained in this package are subject to change without prior notification by the manufacturer.

To reduce the environmental impact of our products, ATEN documentation and software can be found online at

<http://www.aten.com/download/>

Technical Support

www.aten.com/support

Scan for
more information



EMC Information

FEDERAL COMMUNICATIONS COMMISSION STATEMENT:
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) this device must not cause harmful interference, and(2) this device must accept any interference received, including interference that may cause undesired operation.

Important. Before proceeding, download the *Installation and Operation Manual* by visiting the website, www.aten.com and navigating to the product page. The manual includes important warnings, loading specifications and grounding instructions.

이 기기는 업무용 (A급) 전자파적합기기로서 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가령의 지역에서 사용하는 것을 목적으로 합니다.

Requirements

Server

Hardware Requirements

- CPU: Pentium 4, 2.60 GHz or later
- Memory: At least 512MB (1GB or more recommended)
- Hard drive: 500MB or more free space
- Ethernet: At least 1 Ethernet adapter (100Mbps or higher) – Giga LAN recommended

Operating System Requirements

- Windows: Server 2008, Server 2012, Windows Vista, Windows 8, Windows 10 or Server 2016 with Java Runtime Environment (JRE) 8 or later (with the latest service package for each installed)
- Linux (with Java Runtime Environment (JRE) 8 or later)
- Red Hat Enterprise Linux V. 4
- Novell SUSE Enterprise Server 9 and 10
- Ubuntu 15.10 x64
- Ubuntu 15.10 x86
- Debian 8.2 x64

- Fedora 23 x64
- Fedora 23 x86
- OpenSUSE 13.1 x64
- CentOS 7 x64

Device

All ATEN/Altusen products must contain the CC Management function at the firmware level and the CC Management function must be enabled. Download and install the latest version of the relevant firmware from our Website if necessary.

Server Installation

1. Put the software CD that came with your package into the computer's CD or DVD drive.
2. Go to the folder where the installation file (e.g. CC2000_Setup_V3.0.0_ForWindows.exe) is located and execute it. The installer is shown in the **Server Installation Diagram** above.
3. Click **Next** and the installer will display the License Agreement. Click to check I accept terms of the License Agreement and click Next.
4. The installer will prompt you to enter a serial number. Key in the CC2000's

software serial number (the serial number can be found on the CD case) and click **Next**.

5. The installer will bring you to the Choose Installation Folder page. Click **Choose...** to browse and select the location. Click **Next**.
6. In the Choose Shortcut Folder dialog box, click the radio buttons to specify where you would like to create product icons. Click **Next**.
7. In the Configuration dialog box, fill in the fields and click **Next**. Refer to System Info in the user manual for more details.
8. The dialog box changes to inform you that files are being copied to the installation folder. Once the files have been copied, click **Continue**.
9. The Pre-Installation Summary screen appears. If the information is correct, click **Install**.
10. When completed, you may need to restart the system. Click **Done** to exit the installer and restart the system or choose *No, I will restart my system later*.

After the installation, the CC2000 program starts automatically (and starts automatically with every bootup).

You can check if CC2000 has started or not, refer to Post Installation in the user manual for more details.

Logging In

1. Open a browser and specify the IP address of the CC2000 in the browser's URL location bar. You can also use the shortcut created previously.
2. If any Security Alert dialog boxes appear, accept the certificate – it can be trusted.
3. Provide your CC2000 Username and Password and click **Login**. (The pre-installed system administrator account's username is "administrator" and the password is "password".)
4. The system will immediately prompt you to change the login password.
5. Enter the new password, confirm the password again in the next field and click Save.

Note: If you're having trouble logging in, refer to the user manual for more details.

Before devices can be managed, they must first be added into the system. Refer to Preliminary Procedures in the user manual for more information.