


# master view™ max

## 8 / 16 port USB KVM Switch

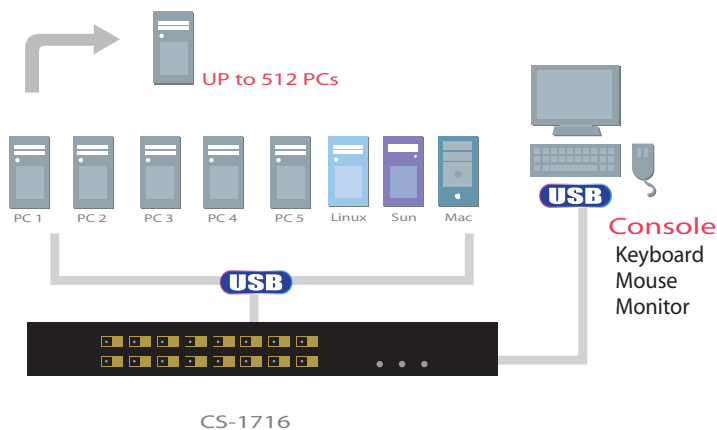

Model: **CS-1708**  
**CS-1716**

### Features

- Control 16 Pure USB computers with one USB K/B, one USB mouse, and one VGA monitor
- Daisy chain up to 31 additional CS-1716 or CS1216A units and control up to 512 computers
- Supports multimedia USB keyboards
- Firmware upgrades to all the chained KVM switches at the same time via the daisy chain cable
- Compatible with all operation platforms: PC, Mac, Sun and Linux
- OSD is mouse driven for quick and convenient navigation of the menu
- OSD selection for OS and keyboard language
- Security- administrator/ user password authorization for enhanced security protection (PSP)
- ATEN USB ASIC Inside

### Specifications:

Function		CS-1708	CS-1716
PC connections	Direct	8	16
	Max via Daisy Chain	256 (32-level)	512 (32-level)
Connectors	Console	K/B	1 x USB Type-A (F)
		Video	1 x HDB15 F(Blue)
		Mouse	1 x USB Type-A (F)
	PC Connectors	8 x SPHD-15 F (Green)	16 x SPHD-15 F (Green)
Chain Ports	In	1 x 25pin D-Type (F)	1 x 25pin D-Type (F)
	Out	1 x 25pin D-Type (M)	1 x 25pin D-Type (M)
Firmware upgrade		1 x RJ 11 (F)	1 x RJ 11 (F)
Power Jack		1	1
Button / Switch	Reset	1 x Semi-hidden@front	1 x Semi-hidden@front
	Upgrade Recover	1 x 2-way	1 x 2-way
	Slide switch		
LEDs	On Line / Selected	8 Orange / 8 Green	16 Orange / 16 Green
	Station ID	2 x orange (7-segement)	2 x orange (7-segement)
Emulation	Power	1 x blue	1 x blue
	Keyboard / Mouse	USB	USB
Port Selection		Hotkeys, OSD	Hotkeys, OSD
VGA Resolution		2048 x 1536; DDC2B	2048 x 1536; DDC2B
Scan Interval		1-255 sec.	1-255 sec.
Power Consumption		DC5V, 6W	DC5V, 6.5W
Housing		Metal	Metal
Weight		2730g	2900g
Dimensions (L x W x H)		433 x 160 x 45mm	433 x 160 x 45mm