

Network/Server Rack (42U)

RC1800 / RC1801 / RC1802

With more than 30 years of experience in R&D and manufacturing cabinet products, ATEN can tailor exclusive products for its customers based on their needs. Our cabinet products, all of which are extremely popular, have been certified by UL and by CE. All ATEN's rack products are EIA/ECA-310-E compliant. Our high-quality cabinets have multiple patents numbered: M377678, M385174, and M513193.

ATEN Racks are designed for energy saving and carbon reduction, all of which feature heavy-duty construction, intelligent design, safety, and robustness. ATEN rack solutions are ideal for any kinds of data center builds and their cable management.

Heavy-duty Construction

- The frame of all our rack products consists of three parts: extruded 6063 T5 aluminum columns, beams and beam-to-column connections that are made of aluminum-alloy (ADC12) with t-shaped brackets. For added robustness, beams and columns are connected to beam-to-column connection by M8 screws
- Static loading capacity up to 1800kg and dynamic loading capacity up to 1000kg
- Certified MIL-STD-167/MIL-STD-810G vibration test (Military Standard)
- Certified GR-63-CORE Zone4 seismic test (Equivalent to earthquake of magnitude eight)
- All ATEN's rack products are EIA/ECA-310-E compliant
- Adjustable mounting rails are made from cold-rolled steel (SPCC). The materials are triple bent so as to enhance its loading capacity

Airflow Management

- The components of the structure are designed for ergonomics with high-precision quality and for optimizing airflow management to conserve energy and reduce carbon emissions
- Perforated doors for massive front-to-rear airflow provide a ventilation rate above 66% (The distance cross the corners of the hexagonal mesh is 2mm, and the length of its side is 5mm)
- Quick-release side panels offer simple and effortless installation
- Multi-module fan unit (2-fan unit / 4-fan unit/ 6-fan unit) can effectively manage the hot air from operating equipment. These are UL compliant and can help increase electrical safety

Intelligent Design


- Multi-stage quick-release top and bottom covers allow cables to easily pass through the rack
- U positions are numbered on adjustable mounting rails to help IT experts recognize the position to quickly install equipment
- M16 leveling feet secure the racks in place by adjusting the leveling feet even if the racks are set up in a server room with non-raised floors
- Lifting eye-bolts (M16 thread) at the top of the rack, which can be used to hang and move the rack when an elevator is not available
- The high-strength horizontal support rails can disperse the weight of IT equipment, making the racks robust and safe.
- Anti-seismic connection design (such as side baying connectors or top baying connectors) offers safe connections in between racks and in between racks and the building

Certifications

- UL Certified and CE Certified
- Compatible with the latest specification of EIA/ECA-310-E
- Certified MIL-STD-167/MIL-STD-810G vibration test (Military Standard)
- Certified GR-63-CORE Zone4 seismic test (Equivalent to earthquake of magnitude eight)
- Qualified for a static load test of 1800kg

RC1802 1200D x 800W (mm)

Rack Side Panels

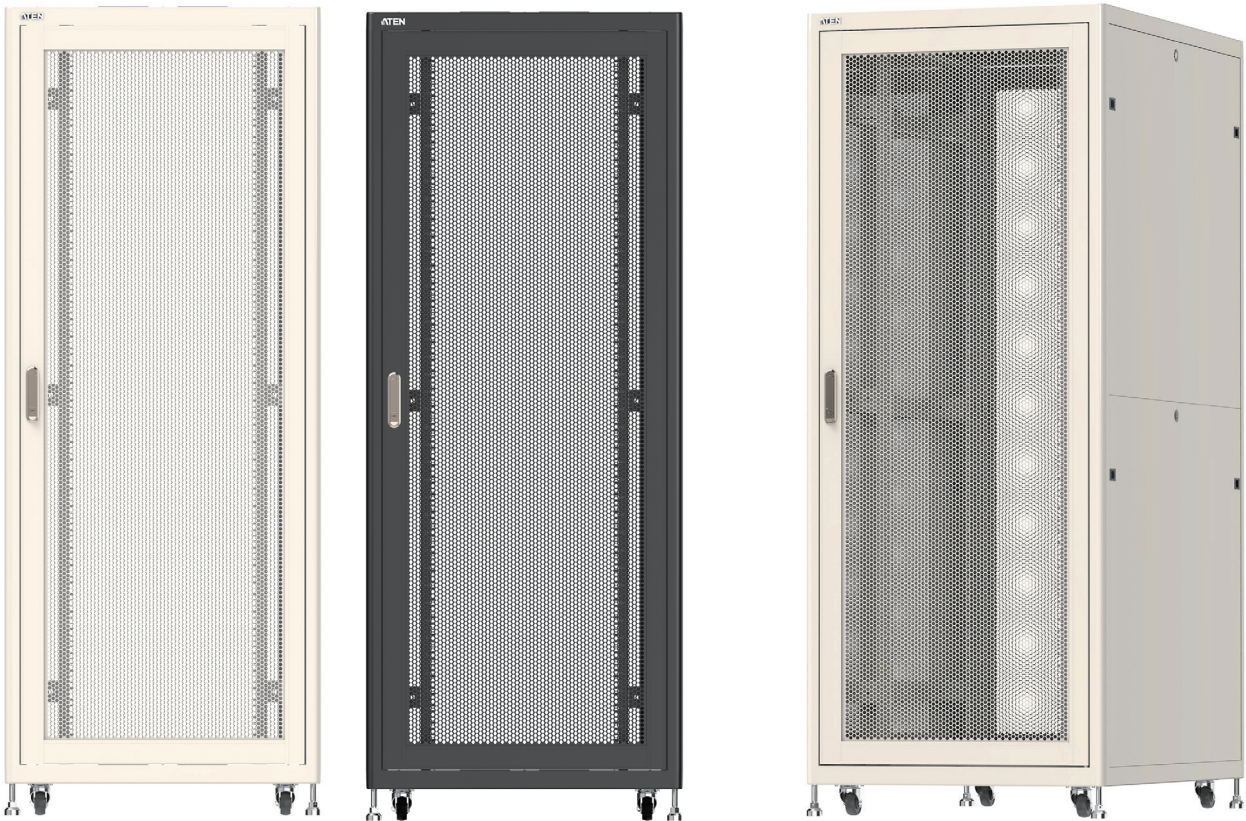


Note: Removable upper and lower side panels, lock is only available on the upper side.


Includes

- Network/server rack enclosure frame
- Perforated front and rear doors with aluminum frame (with door lock and keys)
- Removable upper and lower side panels
- Roof and floor panels
- Casters
- Leveling feet
- M5 Mounting Screws
- M5 Cage nuts

Rack Door Type

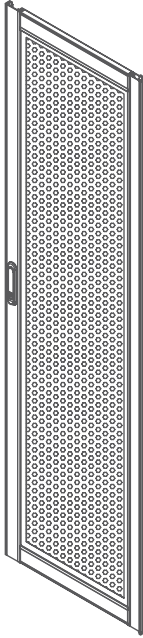

Perforated front and rear doors
with aluminum frame (Standard)

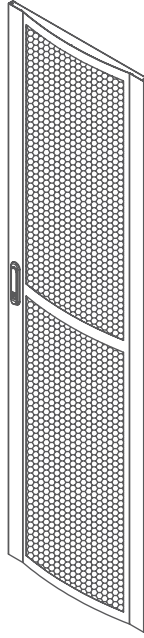


Perforated arc-fold door
with hexagonal pattern (Optional)




Acrylic door with aluminum frame
(Optional)



Glass door with aluminum frame
(Optional)

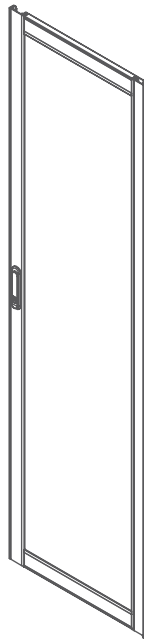

Solid door with aluminum frame
(Optional)

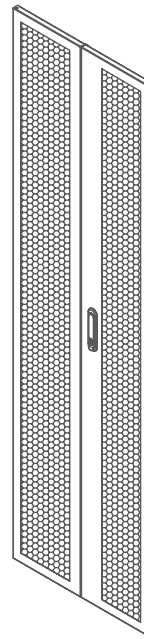

Split door with hexagonal pattern
(Optional)

Specifications

	RC1800	RC1801	RC1802
Physical Properties			
Rack Height (U Spaces)	42U		
Internal Height	1869 mm		
Overall Height, Casters Included	2045 mm		
Overall Height, Casters excluded	1965 mm		
Overall Depth	1000 mm	1100 mm	1200 mm
Overall Width	800 mm		
Color	Black / White		
Enclosure Frame	AL 6063T5		
19" EIA Rails	SPCC / SPHC		
Roof and Floor Panels	SPCC / SPHC		
Door Type	Perforated Front Door with Alu. Frame Perforated Rear Door with Alu. Frame		
Side Panel Type	Lockable Side Panels - Split		
Weight Loading (Static)	1800 kg		
Weight Loading (Dynamic)	1000 kg		

ATEN International Co., Ltd.

3 F., No. 125, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 11/2025 V1.0

© Copyright 2025 ATEN® International Co. Ltd.
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.

