
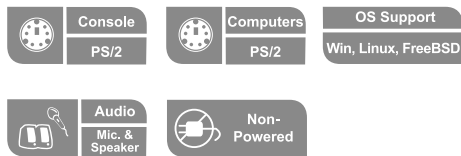


CS62B

2-Port PS/2 KVM Switch

The CS62B 2-Port KVM Switch is a control unit that allows access to two computers from a single console (keyboard, monitor, and mouse). Before the development of the CS62B, the only way to control multiple computer configurations from a single console was through a complex and costly network system. Now, with the CS62B KVM Switch, you can easily access two computers in a cost effective manner.

Diagram

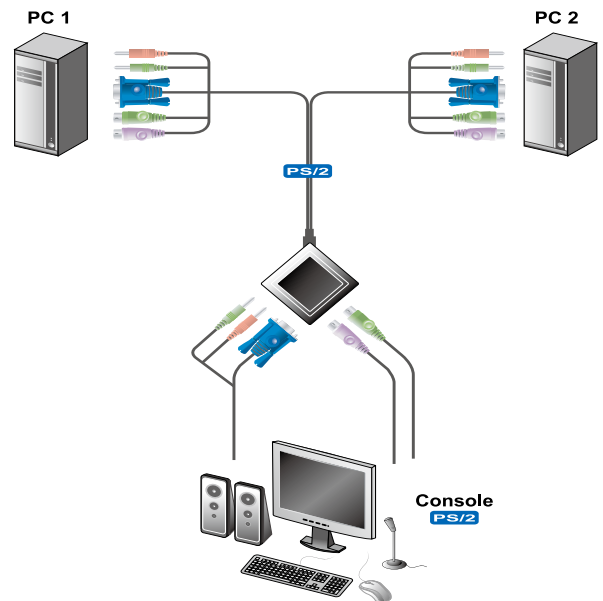

Supports computers that are equipped with audio

Features

- One PS/2 console controls two PS/2 computers
- Compact design, built-in 1.8 m cables
- All-in-one design
- With speaker and microphone support
- Independent switching of the KVM and Audio focus – one computer can have the KVM focus while the other has the audio focus
- Superior video quality – up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered

Specifications

Function		CS62B	
Computer Connections		2	
Connectors	Console Ports	Keyboard	1 x 6-pin Min-DIN Female (Purple)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x 6-pin Min-DIN Female (Green)
		Speakers	1 x Mini Stereo Jack Female (Green)
		Microphone	1 x Mini Stereo Jack Female (Pink)
	KVM Ports	Keyboard	2 x 6-pin Min-DIN Male (Purple)
		Video	2 x HDB-15 Male (Blue)
		Mouse	2 x 6-pin Min-DIN Male (Green)
		Speakers	2 x Mini Stereo Plug Male (Green)
		Microphone	2 x Mini Stereo Plug Male (Pink)
LEDs	Selected	2 (Green)	
Cable Length	Computers	1.8 m	
Emulation	Keyboard/Mouse	PS/2	
Video		2048 x 1536; DDC2B	
Scan Interval		3, 5, 10, 20 seconds	
Environment	Operating Temp.	0°~50°C	
	Storage Temp.	-20°~60°C	
	Humidity	0~80% RH, Non-condensing	
Physical Properties	Housing	Plastic	
	Weight	0.48 kg	
	Dimensions (L x W x H)	7.44 x 7.44 x 2.32 cm	

* The specifications and pictures are subject to change without notice.